

Please note that all prices within this price list will increase by 3.8% from 01.01.2026



Series 2000 Garage Door Price List

01.03.2025

Please note that all prices within this price list will increase by 3.8% from 01.01.2026

HÖRMANN



HÖRMANN IS ALWAYS COMMITTED TO EXCELLENCE: “In Engineering, in User Safety and in Design.”


All our products are third party tested to the highest standards and are certified to the high safety requirements and performance characteristics of the European Standard 13241-1.

This gives you the reassurance that your purchase of a Hörmann product is a safe investment. We are also committed to our national network of Garage Door Specialist Distributors.


These are independent businesses, who believe in customer service and have skills to advise you on the best product for your property, also providing quality fitting and finishing.

“A great product performs at its best when fitted by experts.”


Door Operating Systems

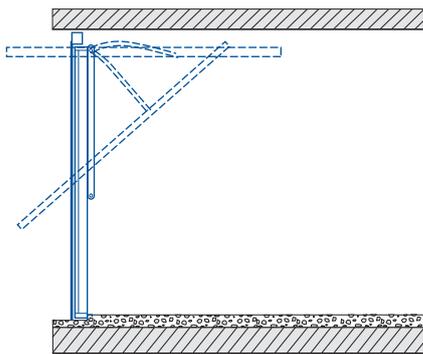


Canopy Operating Gear

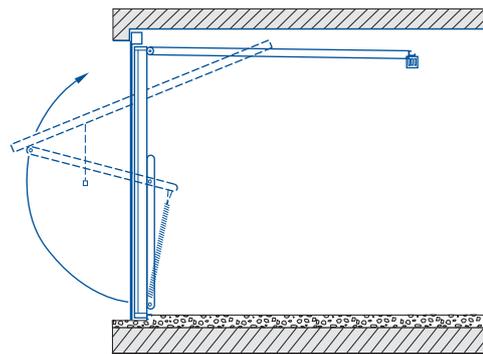

Retractable Operating Gear

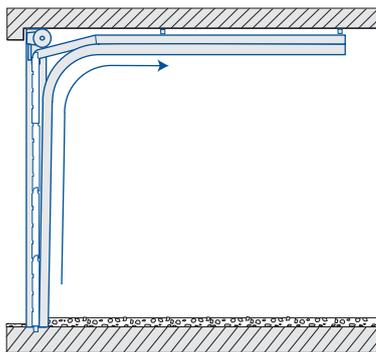

Sectional Operating Gear

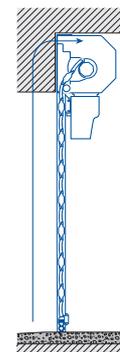


RollMatic Operating Gear

We reserve the right to change specification without prior notification.

Contents

Please note that all prices within this price list will increase by 3.8% from 01.01.2026

	Up-and-over garage doors	Canopy and retractable with steel infill	6
	Sectional garage doors	Sectional garage doors LPU 42 Double-skinned steel sectional doors Secured by Design Optional extras and window designs	12 12 16
	RollMatic roller garage doors	RollMatic RollMatic T RollMatic OD RollMatic side doors	23 32 39 46
	Door operators	Garage door operators Operator accessories Hand transmitters NEW Motion Detectors NEW Led light strips NEW Alarm Sensor	48 48 48 51 54 55



WE THINK AND ACT GREEN. As a family business, we are very conscious of our responsibility to future generations. The Hörmann climate protection strategy aims to reduce and avoid CO2 emissions. We cover 100% of our electrical power needs at all European production locations with purchased green electricity. We are also investing in a clean future with other measures such as the use of recycled paper, CO2-neutral postal shipping, and the recycling of transport packaging to save more than 75,000 tons of CO 2 every year. We work with ClimatePartner to offset the emissions that we do generate by supporting certified climate protection projects. In particular, we offset all CO2 emissions produced in manufacture of products for residential construction as standard.



Measuring sheet

For garage doors

Not for pre-fabricated garage doors!

Customer name: _____

Street: _____

Postal code / city: _____

Construction project _____



Tel.: _____

Fax: _____

Mobile phone: _____

E-mail: _____

Date: _____

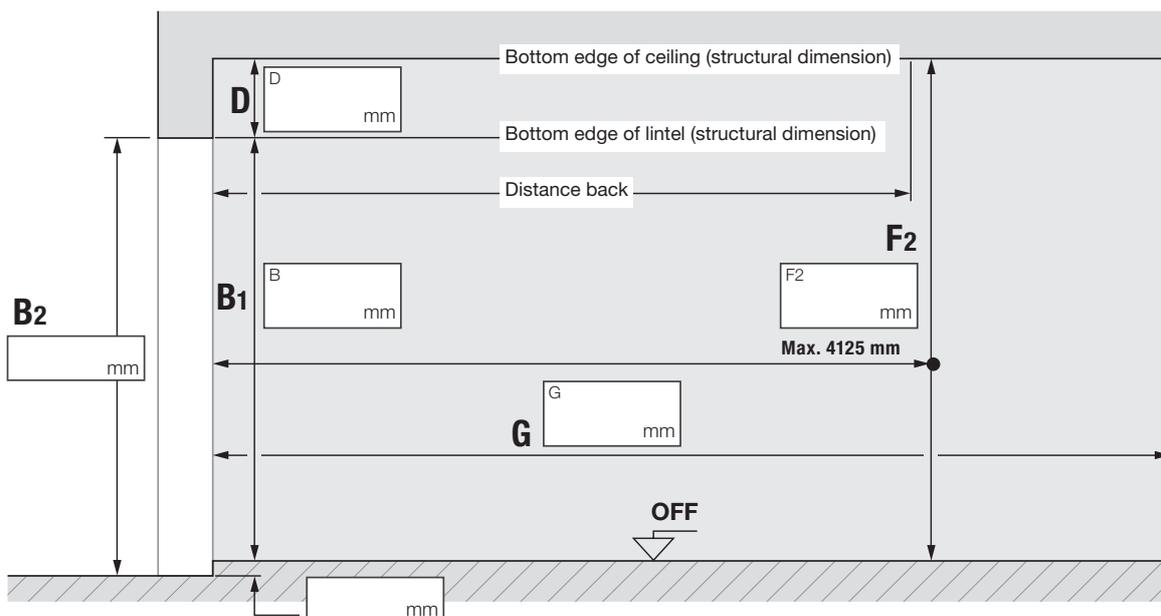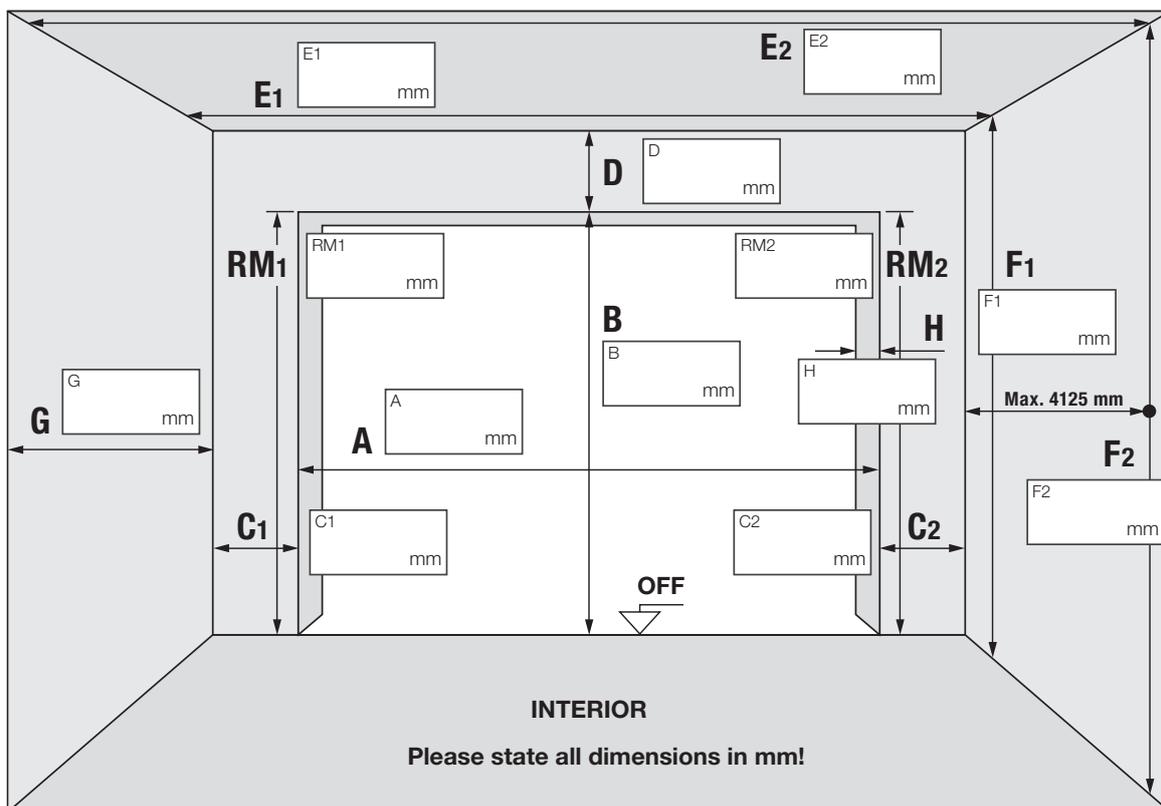

- | | | | | | | | |
|-----------|-----------------------|-----------|----------------------------------|-----------|-------------------------------|------------|--------------|
| A | Clear width | D | Headroom | F1 | Ceiling height from FFL front | H | Reveal depth |
| B | Clear height from FFL | E1 | Interior garage dimensions front | F2 | Ceiling height from FFL back | RM1 | Left grid |
| C1 | Left sideroom | E2 | Interior garage dimensions back | G | Building depth | RM2 | Right grid |
| C2 | Right sideroom | | | | | | |

Series 2000 Up-and-Over Doors



Product description

General aspects

Series 2000 doors are available with either canopy, retractable or retractable plus gear and an optional factory fitted steel frame or supplied for fitting to a timber sub-frame. For Series 2000 and side doors to align, further details are required.

Door leaf

Steel leaf chassis with steel infill, infill or prepared for infill on site. Door leaf reinforced with 2 steel profiles.

Single and double doors with lateral UPVC weather seal as trap guard and sound absorber, fitted to the bottom part of frame and top of door.

Style 2011 Open-for-infill:

Prepared for infill in the frame or overlapping the frame.

Infill weight:

Single doors

min. 6 kg/m²

max. 10 kg/m²


Double doors

min. 6 kg/m²


max. 10 kg/m² standard

View of infill in the frame:


Single doors



Double doors




Max. infill thickness for infill overlapping the frame:



max. 17 mm

for **Single doors:**
16 mm infill thickness
+ 1 mm gap
= 17 mm infill thickness



max. 17 mm

for **Double doors:**
16 mm infill thickness
+ 1 mm gap
= 17 mm infill thickness

Dimension of door leaf

Single doors

BR width - 58 mm

BR height - 10 mm

Double doors

BR width - 58 mm

BR height - 10 mm

Steel frame

Single doors: Optional steel box section frame with horizontal tracks, pivot arms etc all pre-fitted.

Double doors: Optional steel box section frame with horizontal tracks, pivot arms etc all pre-fitted.

Counterbalance

Canopy doors - Single torsion spring shaft fixed to the head frame with cable and rollers running in vertical tracks on the inside frame legs. Spring and vertical tracks incorporate spring and cable break safety system conforming to BS EN 12604.

Retractable doors - Multiple spring safety system: tight coils eliminate the risk of finger trap also conforming to BS EN 12604.

Retractable Plus doors - as retractable doors but with an increased clear drive through height (see data sheet for further information).

Surface protection

Styles with steel infills:

Door leaf made of galvanised material, powder-coated in

- Traffic white, based on RAL 9016,

- Terra brown, based on RAL 8028,

Steel frame powder-coated in the same colour as door.

Fittings and locking

Round plastic handle on the outside, plastic 'rotary disc' on the inside. Special lock with multi-point locking, with profile half cylinder and release button on the inside, 2-point locking by automatic UPVC-latch (adjustable) 4-point locking option also available.

Standard

Single doors pre-assembled UPVC rollers and UPVC bushes in all door bearings and buffer stop.

Double doors track rollers with ball-bearing.


Delivery

Single doors pre-assembled, 1 unit.


Double doors 3 units: door leaf, frame pack and accessories pack.

Arrangement of fitting anchors

Single doors

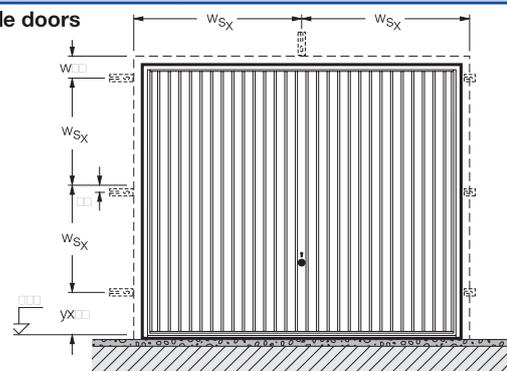

Double doors

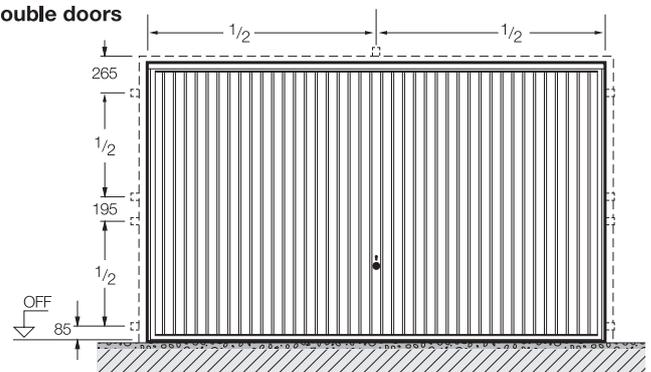

• Note:

Series 2000 Doors do not include a bottom threshold rail as standard.

Doors can also be fitted to a 70 x 70mm nominal goal post frame (minimum 55mm wide for canopy doors).


Series 2000 Up-and-Over Doors




Product description

Fitting behind the opening


Single

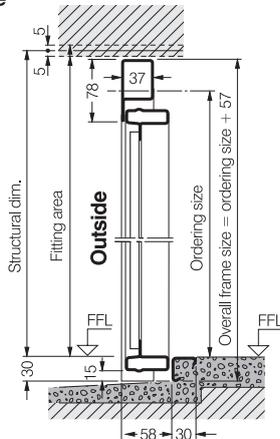


without threshold



Double

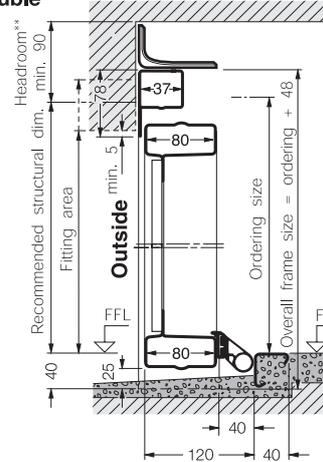



without threshold



** with operator SupraMatic E/P/H


Headroom for single door with steel infill min. 50 mm, with timber infill min. 65 mm

Headroom for double door with steel or timber infill min. 105 mm

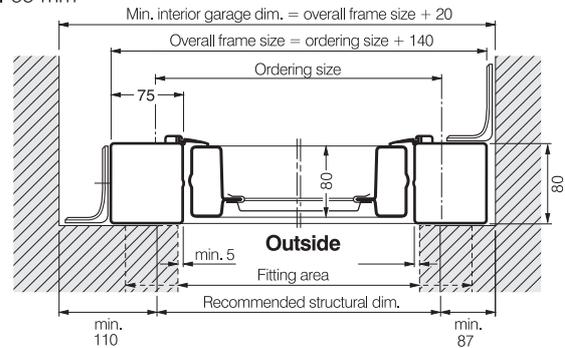
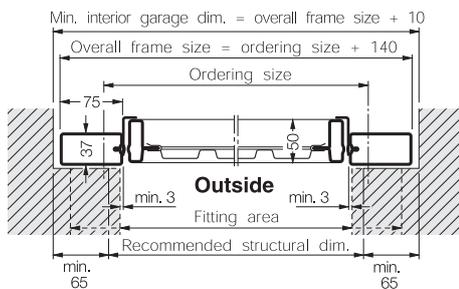


Fitting in the opening


Single

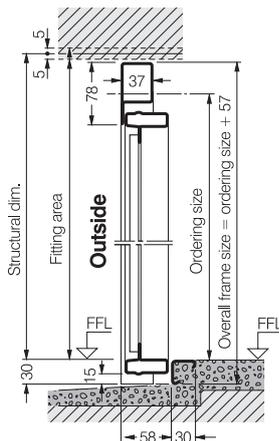



without threshold

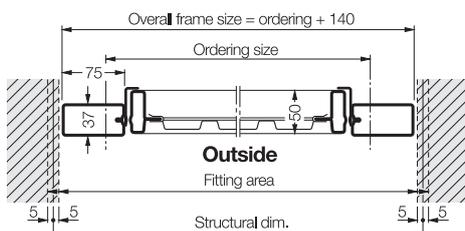

Double

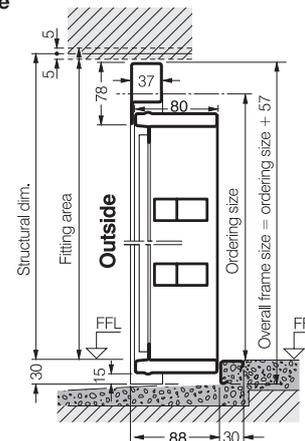





without threshold

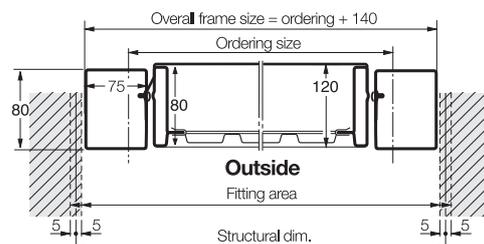



Hörmann Up-and-Over Doors



Canopy & retractable with steel infill

SINGLE DOORS											
Door sizes BR		2001 Vertical		2002 Horizontal		2601 Elegance		2602 Finesse		2101 Ilkley	
Imperial	Metric	CAN.	RET.	CAN.	RET.	CAN.	RET.	CAN.	RET.	CAN.	RET.
6'6" x 6'6"	1981 x 1981	995	1054	876	935						
7'0"	1981 x 2134	995	1054	876	935						
6'10" x 6'4"	2083 x 1930	992	1051	894	953						
6'6"	2083 x 1981	992	1051	916	975						
7'0"	2083 x 2134	1017	1076	950	1009						
7'0" x 6'4"	2134 x 1930	997 ¹	1056 ¹	906	965					1653	1712
6'6"	2134 x 1981	968¹	1027¹	876¹	935¹	1226	1285	1226	1285	1653	1712
7'0"	2134 x 2134	1002¹	1061¹	917¹	976¹	1293	1352	1293	1352	1670	1729
7'6"	2134 x 2286		1226		1143						
7'3" x 6'4"	2210 x 1930	1048 ¹	1107 ¹	985	1044						
6'6"	2210 x 1981	1052	1111	989	1048						
7'0"	2210 x 2134	1065	1124	999	1058						
7'5" x 6'6"	2261 x 1981	1059	1118	985	1044					1715	1774
7'0"	2261 x 2134	1188	1247	1119	1178					1735	1794
7'6" x 6'4"	2286 x 1930	1082	1141	985	1044					1715	1774
6'6"	2286 x 1981	1082 ¹	1141 ¹	985 ¹	1044 ¹	1358	1417	1358	1417	1715	1774
7'0"	2286 x 2134	1188 ¹	1247 ¹	1123	1182	1564	1623	1564	1623	1735	1794
7'6"	2286 x 2286		1333		1367						
7'8" x 6'4"	2337 x 1930	1225	1284	1131	1190						
8'0" x 6'4"	2438 x 1930	1278	1337	1132	1191					1818	1877
6'6"	2438 x 1981	1278 ¹	1337 ¹	1132	1191	1603	1662	1603	1662	1818	1877
7'0"	2438 x 2134	1323 ¹	1382 ¹	1155	1214	1670	1729	1670	1729	1837	1896
7'6"	2438 x 2286		1500		1334						
8'0"	2438 x 2438		1552		1387						
8'6" x 6'6"	2590 x 1981		1441		1284						
7'0"	2590 x 2134		1564		1329						
9'0" x 6'6"	2743 x 1981		1664		1598						
7'0"	2743 x 2134		1818		1675						
10'0" x 6'6"	3048 x 1981		2017		2001						
7'0"	3048 x 2134		2017		2001						
Prices Marked ¹ – optional Terra brown RAL 8028 available. Surcharge on door, see page 9.											
DOUBLE DOORS Internal frame sizes BR		2001 Vertical		2002 Horizontal		2601 Elegance		2602 Finesse		2101 Ilkley	
Imperial	Metric	Retractable		Retractable		Retractable		Retractable		Retractable	
11'0" x 6'6"	3353 x 1981	2192 *		2192 *							
7'0"	3353 x 2134	2209 *		2209 *							
12'0" x 6'6"	3658 x 1981	2302 *		2302 *							
7'0"	3658 x 2134	2319 *		2319 *							
13'0" x 6'6"	3962 x 1981	2504 *		2504 *							
7'0"	3962 x 2134	2523 *		2523 *							
14'0" x 6'6"	4267 x 1981	2413		2413						3340	
7'0"	4267 x 2134	2413		2413						3340	
Prices Marked * – Not available ex-stock, delivery 4–5 weeks											
MATCHING SIDE DOORS Ordering sizes		2001 Vertical		2002 Horizontal		2601 Elegance		2602 Finesse		Style Not Available	
Prices Marked ² – Not available ex-stock, delivery 4–8 weeks											
875 x 1875		685		1450 ²		1354 ²		1354 ²			
875 x 2000		685		1450 ²		1354 ²		1354 ²			
875 x 2125		685 ²		1450 ²		1354 ²		1354 ²			
1000 x 2000		726 ²		1496 ²		1548 ²		1548 ²			
1000 x 2125		726		1496 ²		1548 ²		1548 ²			








										75mm steel framed doors Recommended structural opening sizes allowing tolerance of 10mm on width & 5mm on height For steel frame options see page 9	
2103 Caxton		2004 Georgian		2304 Georgian with windows		2104 Marquess		2504 Countess		Imperial	Metric
CAN.	RET.	CAN.	RET.	CAN.	RET.	CAN.	RET.	CAN.	RET.		
		1207	1266							7'0" x 6'8½"	2135 x 2044
		1228	1287							7'0" x 7'2¾"	2135 x 2199
		1225	1284							7'4" x 6'6½"	2235 x 1994
		1226	1285							7'4" x 6'8½"	2235 x 2044
		1314	1373							7'4" x 7'2¾"	2235 x 2199
		1226	1285							7'6" x 6'6½"	2284 x 1994
1595	1654	1226 ¹	1285 ¹	1674	1733	1226	1285	1226	1285	7'6" x 6'8½"	2284 x 2044
1603	1662	1293 ¹	1352 ¹	1746	1805	1293	1352	1293	1352	7'6" x 7'2¾"	2284 x 2199
										7'6" x 7'8½"	2284 x 2350
		1358	1417							7'9¼" x 6'6½"	2365 x 1994
										7'9¼" x 6'8½"	2365 x 2044
										7'9¼" x 7'2¾"	2365 x 2199
		1358	1417							7'11" x 6'8½"	2411 x 2044
		1564	1623							7'11" x 7'2¾"	2411 x 2199
		1358	1417							8'0" x 6'6½"	2436 x 1994
		1358 ¹	1417 ¹	1810	1869	1358	1417			8'0" x 6'8½"	2436 x 2044
1704	1763	1564 ¹	1623 ¹	2015	2074	1564	1623			8'0" x 7'2¾"	2436 x 2199
										8'0" x 7'8½"	2436 x 2350
		1626	1685							8'2" x 6'6½"	2489 x 1994
		1603	1662							8'6" x 6'6½"	2589 x 1994
		1603	1662			1603	1662			8'6" x 6'8½"	2589 x 2044
		1670	1729			1670	1729			8'6" x 7'2¾"	2589 x 2199
										8'6" x 7'8½"	2589 x 2350
										8'6" x 8'2¾"	2589 x 2503
										9'0" x 6'8½"	2741 x 2044
										9'0" x 7'2¾"	2741 x 2199
			2100							9'6" x 6'8½"	2894 x 2044
			2136							9'6" x 7'2¾"	2894 x 2199
										10'6" x 6'8½"	3199 x 2044
										10'6" x 7'2¾"	3199 x 2199
Style Not Available		2004 Georgian		2304 Georgian with windows		2104 Marquess		Style Not Available		Imperial	Metric
		Retractable		Retractable		Retractable					
										11'6" x 6'8½"	3504 x 2044
										11'6" x 7'2¾"	3504 x 2199
										12'6" x 6'8½"	3809 x 2044
										12'6" x 7'2¾"	3809 x 2199
										13'6" x 6'8½"	4114 x 2044
										13'6" x 7'2¾"	4114 x 2199
		2598		3277 *		2598 *				14'6" x 6'8½"	4419 x 2044
		2598		3277 *		2598*				14'6" x 7'2¾"	4419 x 2199
Style Not Available		2004 Georgian		2304 Georgian with windows		2104 Marquess		Style Not Available			
		1354 ²		1593 ²		1354 ²					
		1354 ²		1593 ²		1354 ²					
		1354 ²		1593 ²		1354 ²					
		1548 ²		1787 ²		1548 ²					
		1548 ²		1787 ²		1548 ²					

Hörmann Up-and-Over Doors



Canopy & retractable with steel infill

SINGLE DOORS											
Door sizes BR		Vertical Decograin Golden Oak or Rosewood		Horizontal Decograin Golden Oak or Rosewood		Georgian Decograin Golden Oak or Rosewood		Marquess Decograin Golden Oak or Rosewood		2011 Open for infill	
Imperial	Metric	CAN.	RET.	CAN.	RET.	CAN.	RET.	CAN.	RET.	CAN.	RET.
6'6" x 6'6"	1981 x 1981									845	904
7'0"	1981 x 2134									845	904
6'10" x 6'4"	2083 x 1930									845	904
6'6"	2083 x 1981										
7'0"	2083 x 2134										
7'0" x 6'4"	2134 x 1930									845	904
6'6"	2134 x 1981	1244	1303	1108	1167	1464	1523	1464	1523	845	904
7'0"	2134 x 2134	1278	1337	1196	1255	1536	1595	1536	1595	894	953
7'6"	2134 x 2286										
7'3" x 6'4"	2210 x 1930									935	994
6'6"	2210 x 1981										
7'0"	2210 x 2134										
7'5" x 6'6"	2261 x 1981									935	994
7'0"	2261 x 2134									965	1024
7'6" x 6'4"	2286 x 1930									935	994
6'6"	2286 x 1981	1324	1383	1226	1285			1626 ⁴	1685 ⁴	935	994
7'0"	2286 x 2134	1427	1486	1363	1422	1875 ⁴	1934 ⁴	1875	1934	964	1023
7'6"	2286 x 2286										
7'8" x 6'4"	2337 x 1930									980	1039
8'0" x 6'4"	2438 x 1930									980	1039
6'6"	2438 x 1981	1523	1582	1351	1410	1907	1966			980	1039
7'0"	2438 x 2134	1568	1627	1398	1457	1973 ³	2032 ³	1973 ³	2032 ³	980	1039
7'6"	2438 x 2286										
8'0"	2438 x 2438										
8'6" x 6'6"	2590 x 1981										
7'0"	2590 x 2134										
9'0" x 6'6"	2743 x 1981										1142
7'0"	2743 x 2134										1160
10'0" x 6'6"	3048 x 1981										1410
7'0"	3048 x 2134										1410
Prices Marked ³ – Only available in Rosewood. Prices Marked ⁴ – only available in Golden oak											
DOUBLE DOORS Internal frame sizes BR		Style Not Available		Style Not Available		Style Not Available		Style Not Available		2011 Open for infill	
Imperial	Metric									Retractable	
11'0" x 6'6"	3353 x 1981										2776
7'0"	3353 x 2134										2900
12'0" x 6'6"	3658 x 1981										2941
7'0"	3658 x 2134										3048
13'0" x 6'6"	3962 x 1981										3084
7'0"	3962 x 2134										3186
14'0" x 6'6"	4267 x 1981										2882
7'0"	4267 x 2134										2882
Prices Marked * – Not available ex-stock, delivery 4 – 5 weeks											
MATCHING SIDE DOORS Ordering sizes		2001 Golden Oak or Rosewood		2002 Golden Oak or Rosewood		2004 Golden Oak or Rosewood		2104 Golden Oak or Rosewood		2011 Open for infill	
875 x 1875		1507 ²		1507 ²		1507 ²		1507 ²		685	
875 x 2000		1516 ²		1516 ²		1516 ²		1516 ²		685	
875 x 2125		1526 ²		1526 ²		1526 ²		1526 ²		685	
1000 x 2000		1743 ²		1743 ²		1743 ²		1743 ²		726	
1000 x 2125		1743 ²		1743 ²		1743 ²		1743 ²		726	



The door leaf and optional box section steel frame are made of galvanised material that is polyester powder coated on both sides.

This finish is extremely durable and the standard colour is Traffic white RAL 9016.

Other colours are available listed in optional extras below.

To help maintain the aesthetic appearance of your door and prevent the build up of dirt, salt and other corrosive substances the door should be washed with a mild soap-based solution on a regular basis.

If the door is located near the coast it is important that the door panel and frame should be washed at least every 2 months.

We also suggest that all other components are brushed down on a regular basis to prevent the build up of dirt and dust etc.

The window frames on the Georgian and Ilkley doors are UPVC and white as standard.

These frames are a 2-part construction with the window material sandwiched between and frames screwed together from the back for security.

The finish of the Decograin doors is a synthetic foil-coated timber design outside (inside primer white).

The leaf frame and fixing frame is a matching powder coating.

Optional extras for Steel Doors	Price
75mm Steel fixing frame for either canopy or retractable geared single doors. Factory fitted	184
75mm Steel fixing frame for either canopy or retractable geared single doors. Factory fitted with frame to compliment Decograin	184
75mm Steel fixing frame for DOUBLE retractable geared doors, when ordered with the door	287
60mm Steel fixing frame for canopy geared doors only. Factory fitted	189
60mm Steel fixing frame for canopy geared doors only. Factory fitted with frame to compliment Decograin	189
Prices marked ¹ – optional Terra Brown RAL 8028 available. Surcharge on door	55
Retractable plus gear for retractable doors up to 7'6" wide giving extra drive through width	
Surcharge on retractable price. Retractable Plus is not available on some sizes and styles of OFI doors – if required, please check with our sales office prior to order acceptance	97
4 point locking kit for extra security, factory fit with door order or retrofit – single door sizes only	87
3 point locking kit for extra security, factory fit with door (this cannot be retrofitted). Available for 2001 side doors only	154
Window options for 2304 Georgian style door – Plain, crossed or diamond style with crystal glazing	Incl.

Colours are available to special order in the following styles:

2001 Vertical, 2002 Horizontal, 2101 Ilkley available in all the listed sizes

2004 Georgian, 2304 Georgian with windows and 2104 Marquess are available in 7066, 7070, 7566, 7570, 7666, 7670 and 8066, 8070 sizes only (where shown)

2601 Elegance and 2602 Finesse are available in white & Anthracite Grey only

Please note: Caxton and Countess steel up-and-over doors are only available in white

Colours Terra brown RAL 8028, Signal blue RAL 5005, Steel blue RAL 5011, Moss green RAL 6005, Ruby red RAL 3003, Jet black RAL 9005 & Anthracite grey RAL 7016

Includes matching frame if ordered with door. White frame RAL 9016 also available, please specify when ordering

Please allow 5-6 weeks lead time for coloured doors

For an increased range of RAL-to-choose colours in our Series 2000 range of up-and-over garage doors, please ask your Hörmann dealer.	Single doors	174
	Double doors	277

Please consult your Hörmann dealer for steel garage door styles that are available from STOCK in colours: Anthracite grey RAL 7016, Jet black RAL 9005, Moss green RAL 6005 and Steel blue RAL 5011

Coloured window frames for Georgian and Ilkley doors:

Coloured window frames to match door colour

Georgian doors (price per window, see note below for the number of windows) **57**

Ilkley doors (price per single door) **246**

Ilkley doors (price per double door) **480**

Please state coloured windows required on order

Orders received without reference will be supplied with white as standard

Georgian doors up to 10' wide = 4 windows, 11' to 13' = 6 windows, 14' = 8 windows

Please note: Doors with windows may have cross bracing or locking rods passing behind the windows depending upon size and gear type.

Optional handle sets

Cast Aluminium silver colour	224
Cast Aluminium white	258
Brushed or polished stainless steel	312
Matching lever handles are also available for side doors	P.O.A.

Sectional doors LPU 42 – steel

Secured by Design



Police Preferred Specification




Product description

Applies to all registered LPU 42/67 unmodified sectional garage doors, using a Hörmann operator and fitted behind the opening. To register your door, email us at info@hormann.co.uk.

Views

(The illustrations correspond to size 2500 x 2125 mm. Deviations may occur with other sizes.)

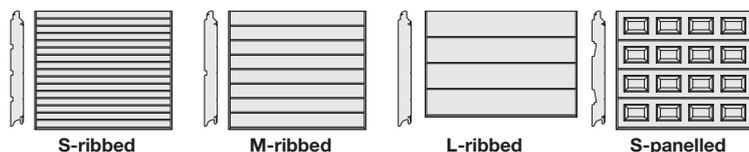

General

Sectional garage doors for private purposes. Prepared for Hörmann garage door operators, 10 door cycles per day in accordance with the guarantee conditions.

Door leaf

With finger trap protection on outside and inside.

Door sections made of double-skinned steel sections, 42 mm thick, made of hot-galvanized sheet steel, PU-foamed.

- S-ribbed *Woodgrain*-embossed on exterior
- M-ribbed *Woodgrain*-embossed, *Slategrain*-embossed, *Silkgrain* or *Decograin* on exterior
- L-ribbed *Woodgrain*-embossed, *Slategrain*-embossed, *Silkgrain*, *Decograin* or *Duragrain* on exterior
- S-panelled *Woodgrain*-embossed or *Decograin* on exterior

Thermal insulation value:

- Section 42 mm $U = 0.5 \text{ W/(m}^2\text{K)}$
 - Fitted door 42 mm (without ThermoFrame)* $U = 1.4 \text{ W/(m}^2\text{K)}$
 - Fitted door 42 mm (with ThermoFrame)* $U = 1.2 \text{ W/(m}^2\text{K)}$
- * Without glazing, door size 5000 x 2250 mm

Versions:

Any door height divided in even door sections (except intermediate heights).

- S- or M-ribbed: horizontal increments evenly spaced in height
- L-ribbed
- S-panelled: panel arrangement evenly spaced in width

The number and division of the panels in an LPU 42 door may deviate from an LPU 42 door with wicket door!

Bottom door section with bottom seal as standard.

Note on door leaf reinforcement:

Solar radiation may result in deflection of the door elements and foam break. To reduce the possibility of section deflection caused by sun exposure, all doors from LZ > 5000 mm are equipped at the factory with the door leaf reinforcement set.

From LZ > 4500 mm, the following colours and decors are equipped at the factory with the door leaf reinforcement set.

- RAL colours

RAL 3007 Black red	RAL 6022 Olive drab
RAL 5003 Sapphire blue	RAL 7016 Anthracite grey
RAL 5004 Black blue	RAL 7021 Black grey
RAL 5011 Steel blue	RAL 7043 Traffic grey
RAL 5013 Cobalt blue	RAL 8014 Sepia brown
RAL 5020 Ocean blue	RAL 8016 Mahogany brown
RAL 5022 Night blue	RAL 8017 Chocolate brown
RAL 6004 Blue green	RAL 8019 Grey brown
RAL 6005 Moss green	RAL 8022 Black brown
RAL 6007 Bottle green	RAL 8028 Terra brown
RAL 6008 Brown green	RAL 9004 Signal black
RAL 6009 Fir green	RAL 9005 Jet black
RAL 6012 Black green	RAL 9011 Graphite black
RAL 6015 Black olive	RAL 9017 Traffic black
- Colour CH 703
- Noir 2100 Sablé (Anthracite metallic)
- Planar CH 7016 Matt deluxe Anthracite grey, CH 8028 Matt deluxe Terra brown and CH 703 Matt deluxe Anthracite metallic
- Decograin decors Dark Oak, Night Oak, Rosewood and Titan Metallic CH 703
- Duragrain decors Sapeli, Terra Walnut, Mocca, Grigio scuro, Rusty Steel, Burned Oak, Cherry, Rusty Oak, Noce Sorrento Balsamico

Colours and decors that have not been listed may be ordered with the door leaf reinforcement set as optional equipment.

In case of any doubt, we recommend ordering the reinforcement as an option for doors under thermal loads not equipped with a door leaf reinforcement at the factory.

Door leaf reinforcements limit section deflection, but do not prevent it completely.

The use of a SupraMatic is recommended for doors with operator and door leaf reinforcements.

Frame

- **Frame** with trap guard, made of hot-galvanized sheet steel, *Woodgrain*-embossed, with side seal and plastic frame shoe. Standard version: Frame with polyester-primer coating in Traffic white, based on RAL 9016; galvanized tracks, suspensions and connection rail. Premium version: Frame, tracks, suspensions and connection rail in Grey white based on RAL 9002.
- **Fascia panel, single-skinned, with seal to make up for insufficient headroom up to 100 mm**
 - in *Woodgrain*-embossed with *Woodgrain* doors.
 - In smooth for *Slategrain*-embossed, *Silkgrain* and *Decograin*. Fascia panel in door colour for doors in RAL 9016, Color, Color Matt deluxe, RAL to choose and Noir 2100 Sablé.
 - in *Decograin* (with plastic film coating, for possible decors see page 19).
 - in *Duragrain* as standard in *Woodgrain* RAL 9016 (optionally available in a colour matching the decor).
- **Frame covering, single-skinned** (optional for a surcharge) required for fitting in the reveal in the versions:
 - in *Woodgrain*-embossed, *Silkgrain* or *Decograin*
 - In smooth for *Slategrain*-embossed or *Duragrain*

For possible surface coating (colours / decors), see product description on page 19. Please state desired colour / decor on order!

Counterbalance

- Tension spring assembly: with lateral integral double tension springs with 2 cables on each side
 - up to door width 3250 mm and door height 2625 mm,
 - up to door width 3500 mm and door height 2375 mm,
 - up to door width 4000 mm and door height 2250 mm
 - Torsion spring assembly: Torsion spring assembly with cable drums and approved spring safety device as well as integral lateral cables
 - from door width 3251 mm and door height 2625 mm,
 - from door width 3501 mm and door height 2375 mm,
 - from door width 4001 mm and door height 2250 mm
- Tension springs and torsion springs are galvanized.

Sectional doors LPU 42 – steel



Product description

Applies to all registered LPU 42/67 unmodified sectional garage doors, using a Hörmann operator and fitted behind the opening. To register your door, email us at info@hormann.co.uk.

Fittings and closing devices

As standard without door handle set and lock. The door handle sets to be ordered separately are supplied including a template for an on-site lock knock-out. A factory lock knock-out will result in a longer delivery time and must be ordered explicitly. If a sectional door without door handle set and lock is equipped with an operator, an emergency release is required if there is no second entrance!

Fitting parts

As standard, the fitting parts are galvanized.

Premium version

The following components are supplied in RAL 9002:

- Door leaf fittings
- Side frames
- Horizontal tracks incl. connection rail and double radius
- Defined accessory parts

Version with break-in-resistant fitting RC 2

Break-in-resistant sectional garage door LPU 42 according to DIN / TS 18194 RC 2 with and without wicket door.

- Only for doors with operator!
- Fitting behind the reveal only!
- For track applications Z, N and L only!
- 2nd entrance to the garage required!
- Premium version possible.

Surface coating of door leaf

Woodgrain, Slategrain and Silkgrain version with polyester-primer coating on both sides

Interior:

- Grey white, based on RAL 9002

Exterior:

- Traffic white as standard, based on RAL 9016
- Color, preferred colours based on the RAL CLASSIC colour chart

RAL 1015	Light ivory	RAL 7038	Agate grey
RAL 6005	Moss green	RAL 7039	Quartz grey
RAL 6009	Fir green	RAL 7040	Window grey
RAL 7012	Basalt grey	RAL 8028	Terra brown
RAL 7015	Slate grey	RAL 9005	Jet black
RAL 7016	Anthracite grey	RAL 9006	White aluminium
RAL 7030	Stone grey	RAL 9007	Grey aluminium
RAL 7035	Light grey		

Hörmann colour CH 703 (Anthracite metallic)

- Noir 2100 Sablé
- RAL to choose*, based on the RAL CLASSIC colour chart
- Special colours on request (other colour systems, such as NCS or DB* colours and colour 8077)

Not available: RAL colours 4006, 4007 and 9021 as well as pearl-effect colours and fluorescent colours.

* In wicket door version in Silkgrain, the following RAL and DB colours are not available:

DB: 701, 702
RAL: 3007, 5004, 7021, 8022, 9004, 9011, 9017, 8077

Version with exterior polyester final coating. For doors with Woodgrain, Slategrain or Silkgrain surface finish (clear varnish)

Final coating:

- Increase of weather protection and prevention of chalking.
- No increase in corrosion protection in the area of cutting edges.

Final coating "Anti-graffiti":

- Simple removal of graffiti by using Graffitix from the manufacturer Matecra. Available from specialised retailers.
- Increase of weather protection and prevention of chalking.
- No increase in corrosion protection in the area of cutting edges.

Note:

The polyester final coating gives the coated surface a more matt appearance. A direct combination of primed and final coated products should be avoided due to the varying gloss levels!

Version with Duragrain coating on exterior

Interior:

- Polyester-primer coating, Grey white, based on RAL 9002

Exterior:

- Coating in Duragrain decor with high-strength coating, authentic surface finish look.

Bamboo	Rusty Oak
Beige	Rusty Steel
Concrete	Sapele
Burned Oak	Sheffield
Cherry	Teak
Spruce	Weathered Look
Grigio	Colonial Walnut
Grigio scuro	Terra Walnut
Malt Oak	White brushed
Mocca	White Oak
Nature Oak	White Oiled Oak
Noce Sorrento Balsamico	Whitewashed Oak
Noce Sorrento Nature	

Colours matching Duragrain

The frame covering and glazing frames are coated in a colour matching the decor. A surcharge on RAL 9016 is charged for a matching colour panel.

Duragrain coating version with individual print on exterior

Interior:

- Polyester-primer coating, Grey white, based on RAL 9002

Exterior:

- Coating in Duragrain individual print with high-strength coating, authentic surface finish look.

Colours matching Duragrain

The colour of the coating on accessory parts (e.g. the frame covering, single-skinned panel and glazing frame) are individually specified by the customer.

Notes:

- Technical feasibility inspection in the factory (on request).
- Not possible for fixed elements, doors with wicket door, chamfered adjustment and PU panels of all kinds.

Decograin version with plastic film coating on the exterior

Interior:

- Polyester-primer coating, Grey white, based on RAL 9002

Exterior:

- Coated with timber design plastic film with embossed timber structure for authentic timber character.

Golden Oak:	Medium-brown, golden yellow oak design
Dark Oak:	Walnut-coloured oak design
Night Oak:	Dark brown oak design
Rosewood:	Mahogany-coloured timber design
Winchester Oak:	Natural-coloured knotty oak design

- Coated with plastic film in **Titan Metallic CH 703** (only for M- or L-ribbed sectional doors)

Colours matched to Decograin

The glazing frames are coated in a colour matching the decor.

Please note that all prices within this price list will increase by 3.8% from 01.01.2026

Hörmann Sectional Doors

LPU 42 – double-skinned doors with steel sections – 42mm

Single doors with Z track tension springs giving low headroom as standard

Secured by Design





Police Preferred Specification



SINGLE DOORS							
Door sizes BR		S-ribbed Woodgrain		M-ribbed Woodgrain		M-ribbed Slategrain	
Imperial	Metric	Outside White	Outside Colour*	Outside White	Outside Colour*	Outside White	Outside Colour*
6'10" x 6'6"	2080 x 2000	1436	1682	1436	1682	1436	1682
6'10" x 6'10"	2080 x 2080	1490	1746	1490	1746	1490	1746
7'0" x 6'6"	2134 x 2000	1487	1739	1487	1739	1487	1739
7'0" x 7'0"	2134 x 2125	1539	1807	1539	1807	1539	1807
7'6" x 6'6"	2286 x 2000	1487	1757	1487	1757	1487	1757
7'0" x 7'6"	2286 x 2125	1539	1826	1539	1826	1539	1826
7'4" x 7'4"	2286 x 2250	1558	1862	1558	1862	1558	1862
7'9" x 7'9"	2286 x 2375	1682	2003	1682	2003	1682	2003
8'2" x 8'2"	2286 x 2500	1676	2014	1676	2014	1676	2014
8'0" x 6'6"	2438 x 2000	1564	1852	1564	1852	1564	1852
7'0" x 7'0"	2438 x 2125	1625	1931	1625	1931	1625	1931
7'4" x 7'4"	2438 x 2250	1611	1935	1611	1935	1611	1935
7'9" x 7'9"	2438 x 2375	1701	2043	1701	2043	1701	2043
8'2" x 8'2"	2438 x 2500	1705	2065	1705	2065	1705	2065
8'6" x 6'6"	2591 x 2000	1564	1870	1564	1870	1564	1870
7'0" x 7'0"	2591 x 2125	1625	1950	1625	1950	1625	1950
9'0" x 6'6"	2740 x 2000	1694	2018	1694	2018	1694	2018
7'0" x 7'0"	2740 x 2125	1753	2097	1753	2097	1753	2097
9'6" x 6'6"	2896 x 2000	1770	2112	1770	2112	1770	2112
7'0" x 7'0"	2896 x 2125	1843	2207	1843	2207	1843	2207
10'0" x 6'6"	3048 x 2000	1710	2070	1710	2070	1710	2070
7'0" x 7'0"	3048 x 2125	1773	2156	1773	2156	1773	2156

*For information on outside colour, see page 11.

Double doors with N track springs (see shaded area of grid). For low headroom see bottom of page 15

DOUBLE DOORS							
Door sizes BR		S-ribbed Woodgrain		M-ribbed Woodgrain		M-ribbed Slategrain	
Imperial	Metric	Outside White	Outside Colour*	Outside White	Outside Colour*	Outside White	Outside Colour*
11'0" x 6'6"	3353 x 2000	2018	2414	2018	2414	2018	2414
7'0" x 7'0"	3353 x 2125	2100	2521	2100	2521	2100	2521
12'0" x 6'6"	3658 x 2000	2310	2742	2310	2742	2310	2742
7'0" x 7'0"	3658 x 2125	2378	2837	2378	2837	2378	2837
13'0" x 6'6"	3962 x 2000	2434	2902	2434	2902	2434	2902
7'0" x 7'0"	3962 x 2125	2508	3005	2508	3005	2508	3005
14'0" x 6'6"	4267 x 2000	2553	3057	2553	3057	2553	3057
7'0" x 7'0"	4267 x 2125	2656	3191	2656	3191	2656	3191
14'6" x 6'6"	4420 x 2000	2639	3161	2639	3161	2639	3161
7'0" x 7'0"	4420 x 2125	2746	3301	2746	3301	2746	3301
15'0" x 6'6"	4572 x 2000	2688	3228	2688	3228	2688	3228
7'0" x 7'0"	4572 x 2125	2793	3367	2793	3367	2793	3367
15'6" x 6'6"	4725 x 2000	2786	3344	2786	3344	2786	3344
7'0" x 7'0"	4725 x 2125	2867	3460	2867	3460	2867	3460
16'0" x 6'6"	4877 x 2000	2802	3378	2802	3378	2802	3378
7'0" x 7'0"	4877 x 2125	2913	3525	2913	3525	2913	3525

Intermediate sizes are available, please see your dealer for more details

Please note that all prices within this price list will increase by 3.8% from 01.01.2026

Hörmann Sectional Doors

LPU 42 – double-skinned doors with steel sections – 42mm

Single doors with Z track tension springs giving low headroom as standard

Secured by Design



Police Preferred Specification



SINGLE DOORS							
Door sizes BR		M-ribbed Silkgrain		M-ribbed Decograin		M-ribbed Titan Metallic CH 703	
Imperial	Metric	Outside White	Outside Colour*	Outside Timber Design*		Outside Titan Metallic CH 703*	
6'10" x 6'6"	2080 x 2000	1767	2013	1943		1943	
6'10"	2080 x 2080	1835	2091	2019		2019	
7'0" x 6'6"	2134 x 2000	1767	2019	1943		1943	
7'0"	2134 x 2125	1835	2103	2019		2019	
7'6" x 6'6"	2286 x 2000	1767	2037	1943		1943	
7'0"	2286 x 2125	1835	2122	2019		2019	
7'4"	2286 x 2250	1919	2223	2113		2113	
7'9"	2286 x 2375	2004	2325	2206		2206	
8'2"	2286 x 2500	2083	2421	2294		2294	
8'0" x 6'6"	2438 x 2000	1870	2158	2061		2061	
7'0"	2438 x 2125	1951	2257	2150		2150	
7'4"	2438 x 2250	2007	2331	2212		2212	
7'9"	2438 x 2375	2103	2445	2318		2318	
8'2"	2438 x 2500	2133	2493	2352		2352	
8'6" x 6'6"	2591 x 2000	1870	2176	2061		2061	
7'0"	2591 x 2125	1951	2276	2150		2150	
9'0" x 6'6"	2740 x 2000	2050	2374	2265		2265	
7'0"	2740 x 2125	2131	2475	2355		2355	
9'6" x 6'6"	2896 x 2000	2159	2501	2388		2388	
7'0"	2896 x 2125	2245	2609	2483		2483	
10'0" x 6'6"	3048 x 2000	2159	2519	2388		2388	
7'0"	3048 x 2125	2245	2628	2483		2483	

*For information on outside colour, see page 11.

Double doors with N track springs (see shaded area of grid). For low headroom see bottom of page 15

DOUBLE DOORS							
Door sizes BR		M-ribbed Silkgrain		M-ribbed Decograin		M-ribbed Titan Metallic CH 703	
Imperial	Metric	Outside White	Outside Colour*	Outside Timber Design*		Outside Titan Metallic CH 703*	
11'0" x 6'6"	3353 x 2000	2584	2980	2869		2869	
7'0"	3353 x 2125	2687	3108	2984		2984	
12'0" x 6'6"	3658 x 2000	2864	3296	3187		3187	
7'0"	3658 x 2125	2956	3415	3289		3289	
13'0" x 6'6"	3962 x 2000	3003	3471	3344		3344	
7'0"	3962 x 2125	3089	3586	3440		3440	
14'0" x 6'6"	4267 x 2000	3092	3596	3445		3445	
7'0"	4267 x 2125	3219	3754	3586		3586	
14'6" x 6'6"	4420 x 2000	3172	3694	3535		3535	
7'0"	4420 x 2125	3302	3857	3680		3680	
15'0" x 6'6"	4572 x 2000	3196	3736	3563		3563	
7'0"	4572 x 2125	3333	3907	3716		3716	
15'6" x 6'6"	4725 x 2000	3259	3817	3634		3634	
7'0"	4725 x 2125	3385	3978	3774		3774	
16'0" x 6'6"	4877 x 2000	3316	3892	3698		3698	
7'0"	4877 x 2125	3449	4061	3847		3847	

Intermediate sizes are available, please see your dealer for more details

Please note that all prices within this price list will increase by 3.8% from 01.01.2026

Hörmann Sectional Doors

LPU 42 – double-skinned doors with steel sections – 42mm


Single doors with Z track tension springs giving low headroom as standard

Secured by Design





Police Preferred Specification



SINGLE DOORS						
Door sizes BR		L-ribbed Slategrain		L-ribbed Silkgrain		L-ribbed Decograin
Imperial	Metric	Outside White	Outside Colour*	Outside White	Outside Colour*	Outside Timber Design*
6'10" x 6'6"	2080 x 2000	1575	1821	1979	2225	2172
6'10"	2080 x 2080	1634	1890	2004	2260	2198
7'0" x 6'6"	2134 x 2000	1637	1889	1979	2231	2172
7'0"	2134 x 2125	1692	1960	2004	2272	2198
7'6" x 6'6"	2286 x 2000	1637	1907	1979	2249	2172
7'0"	2286 x 2125	1692	1979	2004	2291	2198
7'4"	2286 x 2250	1712	2016	2092	2396	2296
7'9"	2286 x 2375	1849	2170	2102	2423	2304
8'2"	2286 x 2500	1843	2181	2153	2491	2361
8'0" x 6'6"	2438 x 2000	1722	2010	2079	2367	2285
7'0"	2438 x 2125	1792	2098	2135	2441	2345
7'4"	2438 x 2250	1772	2096	2155	2479	2366
7'9"	2438 x 2375	1876	2218	2260	2602	2483
8'2"	2438 x 2500	1874	2234	2261	2621	2482
8'6" x 6'6"	2591 x 2000	1722	2028	2091	2397	2298
7'0"	2591 x 2125	1792	2117	2135	2460	2345
9'0" x 6'6"	2740 x 2000	1870	2194	2302	2626	2535
7'0"	2740 x 2125	1936	2280	2334	2678	2570
9'6" x 6'6"	2896 x 2000	1956	2298	2431	2773	2680
7'0"	2896 x 2125	2038	2402	2464	2828	2716
10'0" x 6'6"	3048 x 2000	1890	2250	2431	2791	2680
7'0"	3048 x 2125	1958	2341	2464	2847	2716

* For information on outside colour, see page 11.

Double doors with N track springs (see shaded area of grid). For low headroom see bottom of page 15

DOUBLE DOORS						
Door sizes BR		L-ribbed Slategrain		L-ribbed Silkgrain		L-ribbed Decograin
Imperial	Metric	Outside White	Outside Colour*	Outside White	Outside Colour*	Outside Timber Design*
11'0" x 6'6"	3353 x 2000	2240	2636	2891	3287	3197
7'0"	3353 x 2125	2331	2752	2935	3356	3245
12'0" x 6'6"	3658 x 2000	2575	3007	3044	3476	3369
7'0"	3658 x 2125	2647	3106	3068	3527	3394
13'0" x 6'6"	3962 x 2000	2717	3185	3276	3744	3630
7'0"	3962 x 2125	2797	3294	3363	3860	3727
14'0" x 6'6"	4267 x 2000	2851	3355	3476	3980	3856
7'0"	4267 x 2125	2966	3501	3536	4071	3921
14'6" x 6'6"	4420 x 2000	2947	3469	3539	4061	3926
7'0"	4420 x 2125	3067	3622	3628	4183	4025
15'0" x 6'6"	4572 x 2000	3001	3541	3611	4151	4007
7'0"	4572 x 2125	3123	3697	3670	4244	4072
15'6" x 6'6"	4725 x 2000	3113	3671	3679	4237	4083
7'0"	4725 x 2125	3209	3802	3743	4336	4154
16'0" x 6'6"	4877 x 2000	3134	3710	3744	4320	4157
7'0"	4877 x 2125	3257	3869	3812	4424	4231

Intermediate sizes are available, please see your dealer for more details

Please note that all prices within this price list will increase by 3.8% from 01.01.2026

Hörmann Sectional Doors

LPU 42 – double-skinned doors with steel sections – 42mm



Single doors with Z track tension springs giving low headroom as standard

Secured by Design



Police Preferred Specification





SINGLE DOORS		Imperial	Metric	 L-ribbed Titan Metallic CH703 Outside Titan Metallic CH703*	 L-ribbed Duragrain Outside Decor Coating*	 S-panelled Woodgrain		No. of panels
Door sizes BR						Outside White	Outside Colour *	
6'10" x 6'6"	6'6"	2080 x 2000		2172	2172	1816	2062	4
	6'10"	2080 x 2080		2198	2198	1838	2094	4
7'0" x 6'6"	6'6"	2134 x 2000		2172	2172	1878	2130	4
	7'0"	2134 x 2125		2198	2198	1905	2173	4
7'6" x 6'6"	6'6"	2286 x 2000		2172	2172	1878	2148	4
	7'0"	2286 x 2125		2198	2198	1905	2192	4
	7'4"	2286 x 2250		2296	2296	1897	2201	4
	7'9"	2286 x 2375		2304	2304	2027	2348	4
	8'2"	2286 x 2500		2361	2361	2023	2361	4
8'0" x 6'6"	6'6"	2438 x 2000		2285	2285	1921	2209	4
	7'0"	2438 x 2125		2345	2345	2003	2309	4
	7'4"	2438 x 2250		2366	2366	2001	2325	4
	7'9"	2438 x 2375		2483	2483	2116	2458	4
	8'2"	2438 x 2500		2482	2482	2117	2477	4
8'6" x 6'6"	6'6"	2591 x 2000		2298	2298	1983	2289	4
	7'0"	2591 x 2125		2345	2345	2014	2339	4
9'0" x 6'6"	6'6"	2740 x 2000		2535	2535	2159	2483	4
	7'0"	2740 x 2125		2570	2570	2191	2535	4
9'6" x 6'6"	6'6"	2896 x 2000		2680	2680	2266	2608	5
	7'0"	2896 x 2125		2716	2716	2311	2675	5
10'0" x 6'6"	6'6"	3048 x 2000		2680	2680	2175	2535	5
	7'0"	3048 x 2125		2716	2716	2220	2603	5

* For information on outside colour, see below & page 11.

All coloured doors are special order only – 4 to 8 weeks delivery. Please note: the prices listed as Outside Colour are for the following colours only: RAL 1015, 6005, 6009, 7012, 7015, 7016, 7030, 7035, 7038, 7039, 7040, 8028, 9005, 9006 and 9007, CH703 Anthracite metallic & Chartwell green. Special RAL colours are available, please ask your garage door specialist.

Double doors with N track springs (see shaded area of grid). For low headroom see bottom of page

DOUBLE DOORS		Imperial	Metric	 L-ribbed Titan Metallic CH703 Outside Titan Metallic CH703*	 L-ribbed Duragrain Outside Decor Coating*	 S-panelled Woodgrain		No. of panels
Door sizes BR						Outside White	Outside Colour *	
11'0" x 6'6"	6'6"	3353 x 2000		3197	3197	2599	2995	5
	7'0"	3353 x 2125		3245	3245	2645	3066	5
12'0" x 6'6"	6'6"	3658 x 2000		3369	3369	2998	3430	6
	7'0"	3658 x 2125		3394	3394	3076	3535	6
13'0" x 6'6"	6'6"	3962 x 2000		3630	3630	3189	3657	6
	7'0"	3962 x 2125		3727	3727	3234	3731	6
14'0" x 6'6"	6'6"	4267 x 2000		3856	3856	3319	3823	7
	7'0"	4267 x 2125		3921	3921	3371	3906	7
14'6" x 6'6"	6'6"	4420 x 2000		3926	3926	3401	3923	7
	7'0"	4420 x 2125		4025	4025	3495	4050	7
15'0" x 6'6"	6'6"	4572 x 2000		4007	4007	3502	4042	7
	7'0"	4572 x 2125		4072	4072	3559	4133	7
15'6" x 6'6"	6'6"	4725 x 2000		4083	4083	3504	4062	7
	7'0"	4725 x 2125		4154	4154	3609	4202	7
16'0" x 6'6"	6'6"	4877 x 2000		4157	4157	3602	4178	7
	7'0"	4877 x 2125		4231	4231	3685	4297	7

Low headroom

Door with track application L, torsion spring at the back

£180

Intermediate sizes are available, please see your dealer for more details


Hörmann Sectional Doors



Optional extras for sectional doors

Colour surcharge	Price
RAL to choose colours (please ask to see colour chart)	per m ² 95
Door leaf in special colours (please ask to see colour chart)	per m ² 188

Fittings	Article no.	£
The below listed handle sets are supplied with:		
• Lock with profile half cylinder with side locking		
• Template for lock knock-out on site		
A factory lock knock-out will result in a longer delivery time and must be ordered explicitly (State position on order!)		

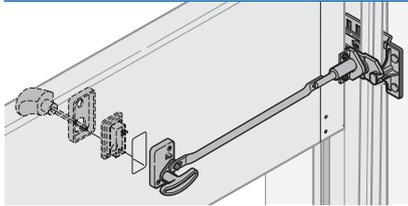

Door handle set, black plastic, prepared for profile cylinder	4015100	Each	87
Door handle set, cast aluminium RAL 9016, prepared for profile cylinder	3060831	Each	242
Door handle set, brown cast aluminium, prepared for profile cylinder	3076054	Each	242
Door handle set, brushed stainless steel, prepared for profile cylinder	3060835	Each	242

Emergency release	£
Emergency release for sectional doors with handle set (Please state at point of order)	Each 58
Emergency release for sectional doors without handle set (Please state at point of order)	Each 55

Special anchor set	Article no.	£
Set of 8 special anchors for side frame fitting up to LZ = 5500 mm	3056482	per set 77

Reinforces the complete frame in difficult fitting situations

90

160 - 180

160 - 180

90 - 125

Unevenness can be accommodated without having to use packing or subframe

Fitting in the opening without additional posts (Frame covering must also be ordered)

Fitting behind brickwork risk-free

Frame cover profiles matching the colour of the door – 55mm x 19.5mm and 90mm x 19.5mm: prices are per pair

Door heights	White RAL 9016						Colour					
	Woodgrain		Silkgrain		Slategrain		Woodgrain		Silkgrain		Slategrain	
	55mm	90mm	55mm	90mm	55mm	90mm	55mm	90mm	55mm	90mm	55mm	90mm
2000mm	92	126	98	138	98	138	106	158	128	162	128	162
2080mm	96	132	102	144	102	144	111	165	134	169	134	169
2125mm	98	134	105	147	105	147	113	168	136	173	136	173
2250mm	104	142	111	156	111	156	120	178	144	183	144	183
2375mm	110	150	117	164	117	164	126	188	152	193	152	193
2500mm	115	158	123	173	123	173	133	198	160	203	160	203

Frame cover profiles matching the colour of the door – 55mm x 19.5mm and 90mm x 19.5mm: prices are per pair

Door heights	RAL to choose/CH 703						Decograin/Titan Metallic CH 703		Duragrain	
	Woodgrain		Slategrain		Silkgrain		55mm	90mm	55mm	90mm
	55mm	90mm	55mm	90mm	55mm	90mm	55mm	90mm	55mm	90mm
2000mm	152	222	158	240	158	240	140	176	140	176
2080mm	159	231	165	250	165	250	146	184	146	184
2125mm	162	236	168	255	168	255	149	187	149	187
2250mm	171	250	178	270	178	270	158	198	158	198
2375mm	181	264	188	285	188	285	167	209	167	209
2500mm	190	278	198	300	198	300	175	220	170	215

For all available colours and finishes please refer to page 11. Duragrain - New smooth matching surface coating in Duragrain.

Retrofit fascias

Door heights	White RAL 9016			Colour			RAL to choose/CH 703			Decograin/Titan Metallic CH 703	Duragrain
	Woodgrain	Slategrain	Silkgrain	Woodgrain	Slategrain	Silkgrain	Woodgrain	Slategrain	Silkgrain		
Set: Renovation fascias to cover damaged brickwork edges consisting of: 3 angle sections, 69/40mm, each 3000mm long											
Price	237	257	257	300	320	320	338	358	358	269	269
Set: Fascia frame -95- consisting of: 2 fascias, 95mm, 2800mm long, 1 fascia 95mm, 3200mm long, fixing material											
Price	274	293	293	337	355	355	375	393	393	301	301

Please note that all prices within this price list will increase by 3.8% from 01.01.2026

Hörmann Sectional Doors



Glazing options for sectional doors

LPU 42 with 16mm (for panelled) or 22mm (for ribbed) double pane in clear (DS) or crystal structure (DK)

Glazings			£/each
S0		With synthetic double pane, 16 mm or 22mm, clear / clear or crystal structure / crystal structure	LPU 42 152
S1		With synthetic double pane, 16 mm or 22mm, clear / clear or crystal structure / crystal structure	LPU 42 188
S2		With synthetic double pane, 16 mm or 22mm, clear / clear or crystal structure / crystal structure	LPU 42 188
S 10 – S 60		With synthetic double pane, 16 mm or 22mm, clear / clear or crystal structure / crystal structure	LPU 42 193
M0		<ul style="list-style-type: none"> With synthetic double pane, 22 mm, Clear / clear or crystal structure / crystal structure 	LPU 42 185
For door width and glazing configuration, please refer to the 01-25 A price list			
Type D		<ul style="list-style-type: none"> With synthetic double pane, clear / clear or crystal structure / crystal structure, 16 mm 	LPU 42 152
For door width and glazing configuration, please refer to the 01-25 A price list			


Sunrise Glazing (Available for UK modification whilst stocks last)			£/section
S10		<ul style="list-style-type: none"> With synthetic double pane, 16 mm or 22mm Clear / clear or crystal structure / crystal structure 	LPU 42 Door width 2130 mm up to 2750 mm For LPU 42 (4 × £193) 772
S20		<ul style="list-style-type: none"> With synthetic double pane, 16 mm or 22mm Clear / clear or crystal structure / crystal structure 	LPU 42 Door width 2755 mm up to 3500 mm For LPU 42 (5 × £193) 965
S30		<ul style="list-style-type: none"> With synthetic double pane, 16 mm or 22mm Clear / clear or crystal structure / crystal structure 	LPU 42 Door width 3505 mm up to 4000 mm For LPU 42 (6 × £193) 1158
S40		<ul style="list-style-type: none"> With synthetic double pane, 16 mm or 22mm Clear / clear or crystal structure / crystal structure 	LPU 42 Door width 4005 mm up to 4750 mm For LPU 42 (7 × £193) 1351
S50		<ul style="list-style-type: none"> With synthetic double pane, 16 mm or 22mm Clear / clear or crystal structure / crystal structure 	LPU 42 Door width 4755 mm up to 5500 mm For LPU 42 (8 × £193) 1544
S60		<ul style="list-style-type: none"> With synthetic double pane, 16 mm or 22mm Clear / clear or crystal structure / crystal structure 	LPU 42 Door width 4755 mm up to 5500 mm For LPU 42 (8 × £193) 1544

Standard Colour Surcharges for the above windows. Please note: front window frame only is painted			Price
Standard colour for Decograin/Duragrain	For glazing S0, S1, S2 & M0 & type D	Each	42
	For Sunrise glazing × No. of frames for width of door	Each	49
RAL to choose	For glazing S0, S1, S2 & M0 & type D	Each	70
	For Sunrise glazing × No. of frames for width of door	Each	87

Roller garage door RollMatic

Including operator

Roller garage door RollMatic product description



General

Spring-compensated roller garage door for private applications. As standard, only when the Hörmann operator RollMatic is used, version as internal roller garage door or external roller garage door, max. 10 door cycles per day according to the warranty conditions.

Frame

- Aluminium extrusion profile side guides with integrated slider profile and brush seal. Coating in door curtain colour.
 - Decopaint version:
Colours matching the Decopaint surface finish.
 - Decograin version – fitting behind the opening:
Colours matching the Decograin surface finish.
 - Decograin version – fitting in the opening:
Plastic film coating in colour of door curtain.
- Lintel and curtain cover made of sheet steel, coated in door curtain colour.
 - Decopaint / Decograin version:
Colours matching the Decopaint / Decograin surface finish.
- Side cladding made of sheet steel, coating in the door curtain colour.
 - Decopaint / Decograin version:
Colours matching the Decopaint / Decograin surface finish.

Door curtain

Rolled aluminium profile foamed with polyurethane rigid foam with integrated wind locks, profile height 77 mm. Coloured versions with two-layer coil coating with a paint system based on a high-quality polyurethane coated with polyamide.

Notice:

All Hörmann roller garage doors correspond to their technical properties and use state-of-the-art paint systems. Pressure marks and abrasive wear are design-related and cannot be avoided. They do not impair the function and the durability of the roller garage door.

Surface coating

Version in standard colours

Interior and exterior of door curtain:

- Standard colours based on the RAL colour chart:

RAL 9016	Traffic white	RAL 7035	Light grey
RAL 1015	Light ivory	RAL 7038	Agate grey
RAL 3003	Ruby red	RAL 8028	Terra brown
RAL 3004	Purple red	RAL 9001	Cream
RAL 5011	Steel blue	RAL 9005	Jet black
RAL 6005	Moss green	RAL 9006	White aluminium
RAL 7015	Slate grey	RAL 9007	Grey aluminium
RAL 7016	Anthracite grey		
- Chartwell Green
- Noir 2100 Sablé (Anthracite metallic) – at a surcharge

Dark colours should not be used for doors that are exposed to the sun.

IMPORTANT:

Our garage doors RollMatic are made of different materials. Particularly in the case of darker colours based on RAL 7015, RAL 7035, RAL 7016, RAL 8028, RAL 9005, RAL 9006 or RAL 9007 as well as the colour Noir 2100 Sablé, a differentiated colour perception between the sections and other coloured components of the door may occur depending on the lighting on-site. Such colour deviations do not warrant a complaint.

Decopaint version with paint in timber design look

Interior and exterior of door curtain:

- Golden Oak** – medium brown, yellow-gold surface with vibrant oak character
- Rosewood** – reddish-brown stripey timber design

Decograin version with plastic film coating with timber design (not available for external roller garage doors)

Door curtain, exterior:

- Coated with UV-resistant plastic film with timber design with embossed grain for authentic timber character.
 - Golden Oak** – medium brown, yellow-gold surface with vibrant oak character
 - Rosewood** – reddish-brown stripey timber design

Door curtain, interior:

- Terra brown coating based on RAL 8028

Counterbalance

Tension spring assembly with lateral integral double tension springs. Cladding of internal roller garage door with transparent plastic and with aluminium profiles with integrated window cut-outs for external roller garage doors. Transmission of forces via two cables.

Manually operated version (not possible with external roller garage door)

Door operated via chain hoist and interior / exterior handle.

Fittings and closing devices

Lockable bottom profile with two-point locking for manually operated doors. Locking with operator RollMatic.


Chamfered bottom weather seal (optional, not available for manual operation)

Optional bottom profile to compensate for uneven floors (up to 300 mm height difference). Standard colour Jet black RAL 9005. Optional coating available in door curtain colour (with the exception of Decopaint and Decograin).

Delivery

1 unit including operator / chain hoist

Glazing and/or ventilation grille arrangement (optional)

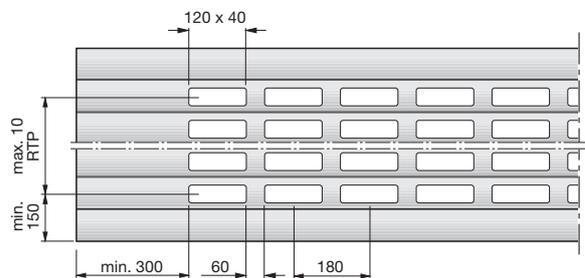

Notice:


- Glazing / ventilation arrangement is only possible starting at the 2nd section from the bottom.
- For technical reasons, the glazing / ventilation arrangement in the curtain is only possible starting at the 8th visible section from the top.

- max.** = Maximum
- min.** = At least
- RTP** = Rolling shutter lath

Roller garage door RollMatic

Including operator

Operator RollMatic product description



Roller garage door operator RollMatic



Operator RollMatic series 2



Control RollMatic series 2
In a separate housing

- Internal roller garage door: operator always on left when viewed from inside
- External roller garage door: standard operator left, right can be selected (not shown), integrated in the curtain cover



**RollMatic
Series 2**

Operator incl. control	Price in £	Included in the door price
Product description		
Door cycles (Open / Close)	Per day / per hour	25 / 10
Suitable for:	<ul style="list-style-type: none"> • The industrial sector • Max. door width • Max. door leaf surface 	<p>–</p> <p>6000</p> <p>15 m²</p>
Operator data		
Motor		24 V DC gear drive
Mains voltage		230 V – 240 V AC
Power input		0.5 kW
Opening speed ³⁾		max. 20 cm/s ³⁾
Standby		< 1 W
Housing		<ul style="list-style-type: none"> • Plastic housing with an external operator. • Integrated in curtain cover for external roller garage doors.
Temperature range		–20°C to +60°C
Protection category		Only for dry rooms
Control electronics		
Display		Double 7-segment display
Operation and programming		Control element with Open / Close / PRG buttons
Impulse control		●
Adjustable power limit		●
Adjustable soft start and soft stop		●
Adjustable operator light / partial opening / ventilation position		●
Adjustable automatic timer		5 – 300 sec.
Adjustable automatic timer / partial opening		5 – 240 min.
Adjustable / pre-set operator light		30 – 600 sec. / 120 sec.
High-speed opening		●
Equipment		
Hand transmitter (868 MHz)		2 X 4-button hand transmitter HSE 4 BS, textured surface (black) with chrome caps
Integrated receiver (868 MHz)		Bi-directional 7-channel receiver BS
Integrated Bluetooth® receiver (2.4 GHz)		●
LED lighting		●
Connection for photocell / closing edge safety device		● / ●
Connection of external control elements		●
Connection for emergency battery		●
Connecting lead with CEE plug		●
Closing edge safety device		Roller garage door LB > 5000 mm – optical closing edge safety device installed at the factory in the bottom profile ensures safety as per DIN EN 13241-1, closing edge safety device with spiral cable

Notice:

Installation of a photocell is required if the automatic timer is activated!

For optional extras see the Door operators section, See door operators section in the 01-25 A Dealer Price List

Roller garage door RollMatic


Including operator

Internal roller garage door fitting dimensions



Fitting behind the opening

Operator / chain hoist interior left

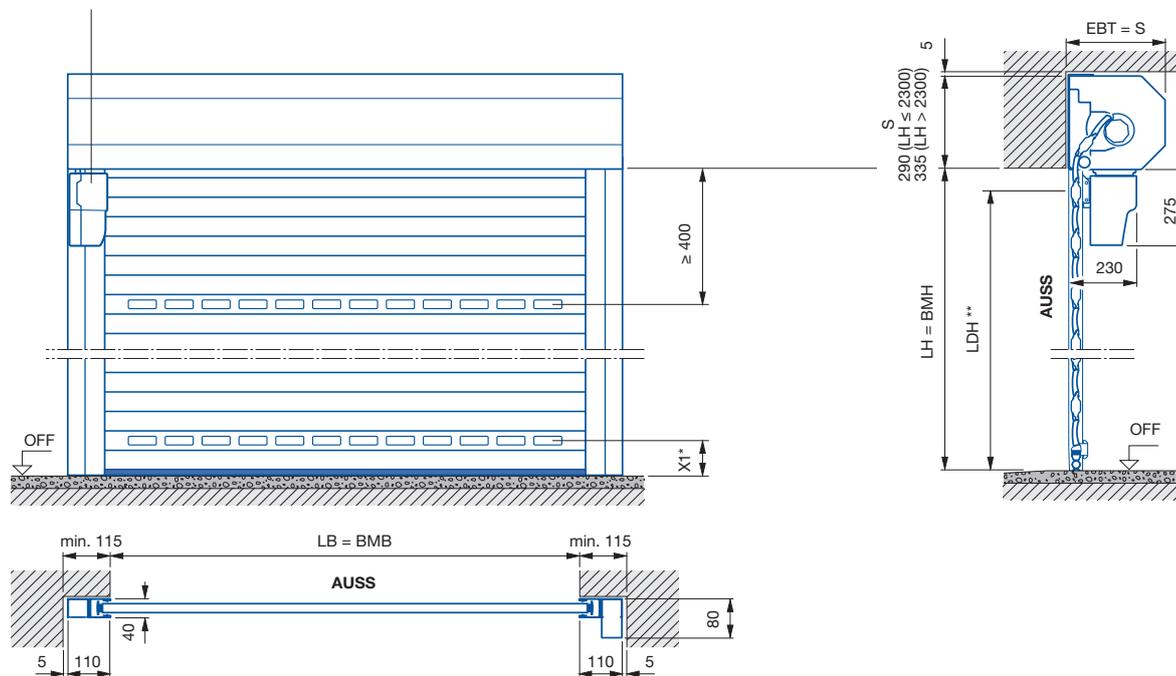


* X1 – min. 150 mm (dimension without chamfered bottom profile)

** See the table “Dimensions” on page 22

Fitting in the opening

Operator / chain hoist interior left

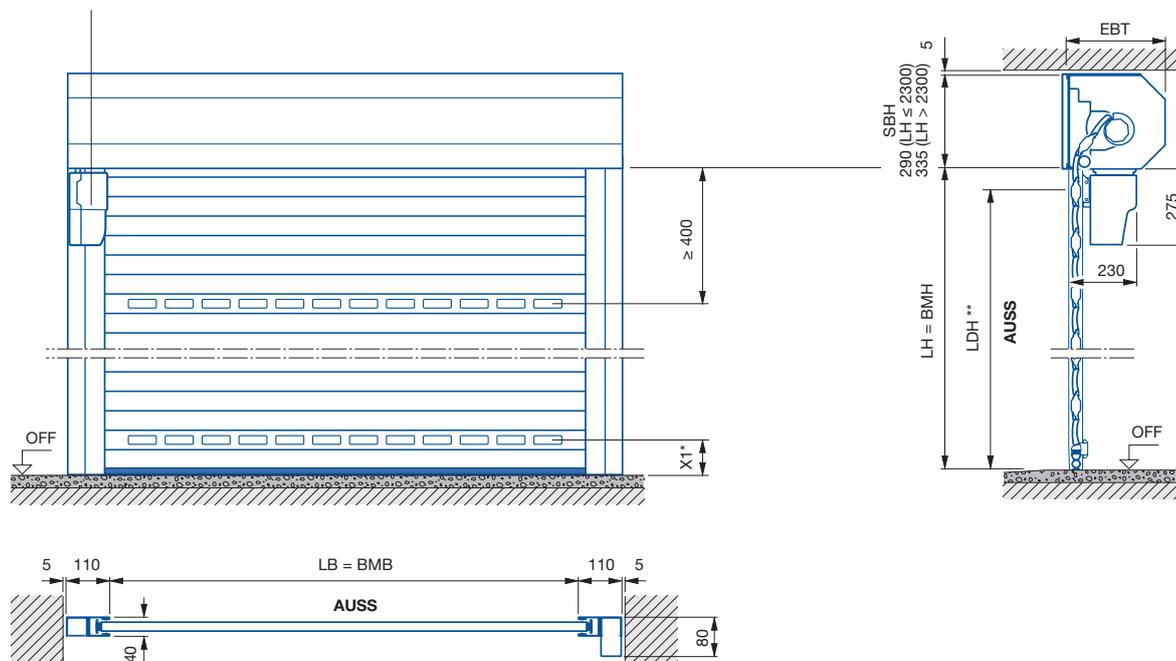

* X1 – min. 150 mm (dimension without chamfered bottom profile)

** See the table “Dimensions” on page 22

An additional fascia panel is required!
See accessories on page 25


Chamfered bottom profile

See page 25

Roller garage door RollMatic


Including operator

External roller garage door fitting dimensions



External roller garage door – fitting in front of the opening

Operator as standard on left when viewed from outside. Operator on right optionally available.

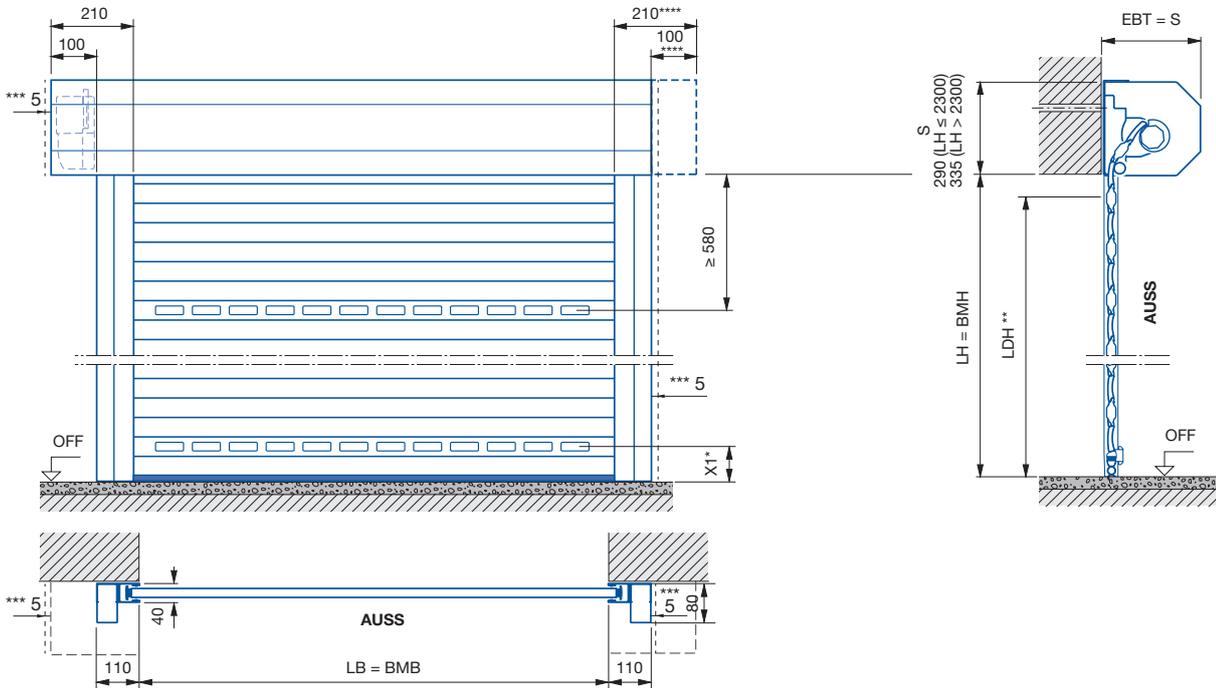

* X1 – at least 150 mm (dimension without chamfered bottom profile)

** See the table "Dimensions"

*** At least 5 mm distance from fascia panel / side guide


**** For a visually balanced appearance, the curtain cover can be ordered in a symmetrical version!

Note: not possible with external roller garage doors LB > 5750 mm

External roller garage door as entrance gate – fitting behind the opening (not self-supporting)

Operator as standard on left when viewed from inside, optionally operator on right.

- Fitting only possible when fitted on the all-round building structure
- A protective box IP 65 is required for the control, fitting inside on operator side

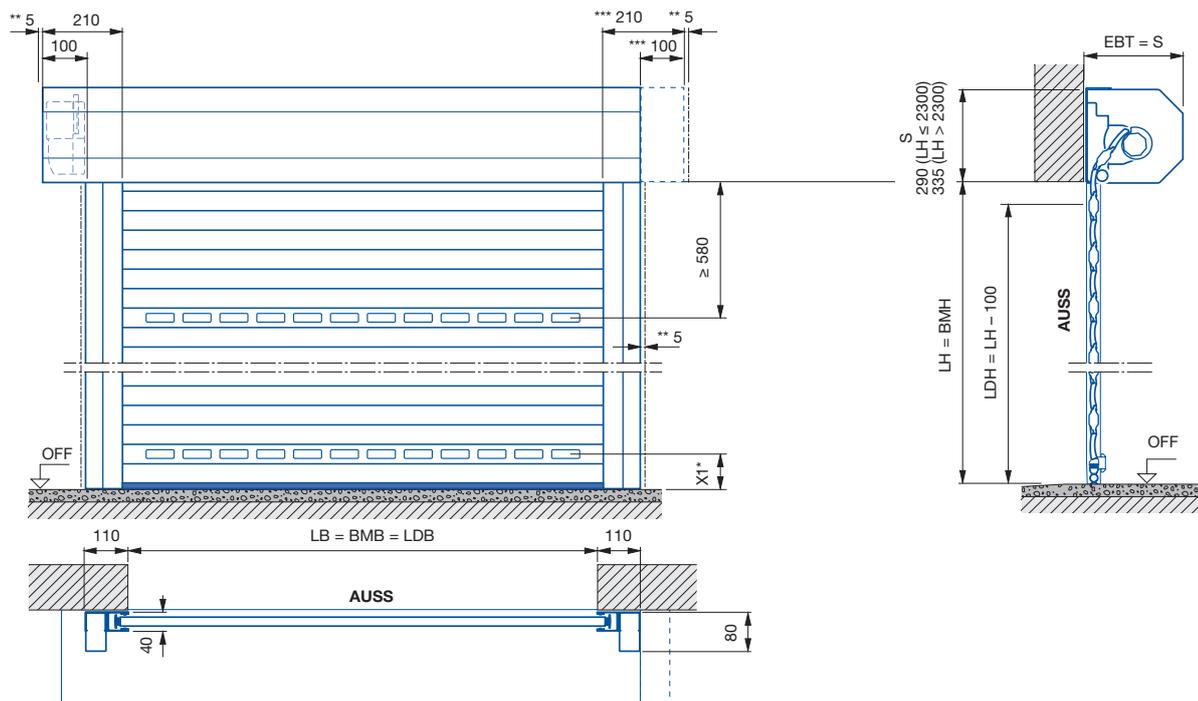

* X1 – at least 150 mm (dimension without chamfered bottom profile)

** At least 5 mm distance from fascia panel / side guide

*** For a visually balanced appearance, the curtain cover can be ordered in a symmetrical version!

Note: not possible with external roller garage doors LB > 5750 mm

Chamfered bottom profile

See page 25

Roller garage door RollMatic

Including operator


Fitting dimensions



External roller garage door as entrance gate – fitting in front of the opening (not self-supporting)

Operator as standard on left when viewed from outside, optionally operator on right.

- Fitting only possible when fitted on the all-round building structure
- A protective box IP 65 is required for the control, fitting inside on operator side
- Additionally required: fitting compensation set and DuraBelt

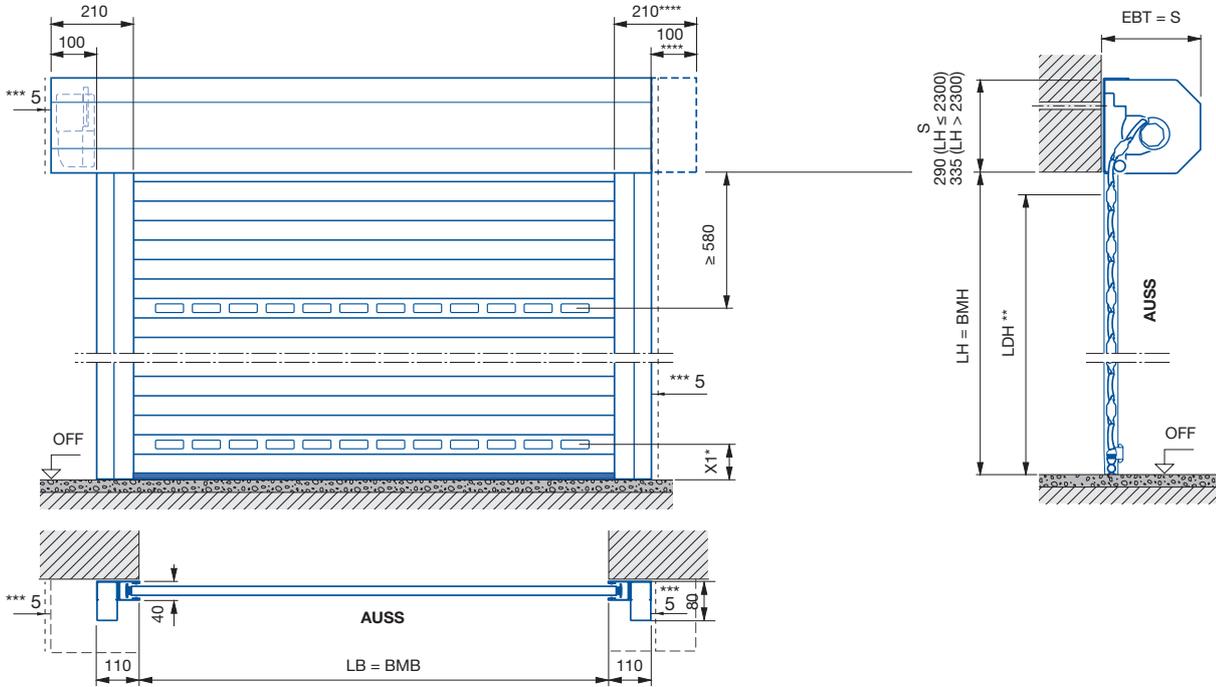

* X1 – at least 150 mm (dimension without chamfered bottom profile)

** See the table “Dimensions”

*** At least 5 mm distance from fascia panel / side guide


**** For a visually balanced appearance, the curtain cover can be ordered in a symmetrical version!

Note: not possible with external roller garage doors LB > 5750 mm

Dimensions

	Version with operator RollMatic	Manually operated version (not available for external roller garage doors)
Clear passage height	= Clear height (ordering size height) – 100 mm	= Clear height (ordering size height) – 125 mm
Clear passage width	= Clear width (ordering size width)	= Clear width (ordering size width)

Chamfered bottom profile

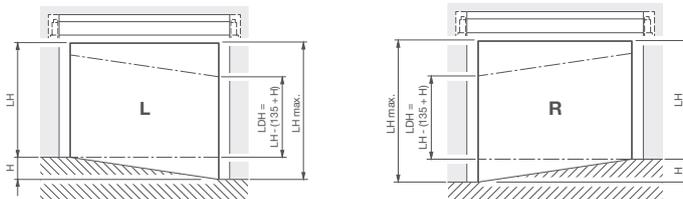

Chamfered bottom profile – view of fitting side
Internal roller garage door from inside
External roller garage door from outside

LH = (clear height on short side) = ordering size height (BMH)
LH max. = 3100 mm
LH min. = 1600 mm
H = Height – difference max. 300 mm

AUSS Exterior
BMB Ordering size width
BMH Ordering size height
EBT fitting depth
LB Clear width
LH Clear height
LDB Clear passage width
LDH Clear passage height

FFL Finished floor level (FFL)
RAMB Overall frame width
RAMH Overall frame height
S required headroom
SBH Additional fascia panel height
Min. At least
Max. Maximum

Optional extras

For roller garage door RollMatic including operator





Fitting compensation set		Article no.	£
(to accommodate for unevenness on the building structure, recommended when fitting behind / in front of the opening)			
Fitting compensation set LH ≤ 2300		8991235	Per set 66
Fitting compensation set LH > 2300		8991236	Per set 71

DuraBelt – winding unit		Article no.	£
We include the DuraBelt winding unit to reduce design-related abrasion on the door curtain to a minimum	LB 1000 – 1600 mm	2 winding units	Deduction per door 92
	LB 1601 – 3000 mm	3 winding units	Deduction per door 138
	LB 3001 – 5000 mm	5 winding units	Deduction per door 230
	LB 5001 – 6000 mm	6 winding units	Deduction per door 275
DuraBelt can be optionally removed with the deductions shown to the right	Retrofit kit	2 winding units	8995301 Per door 139
	Up to LH 2300 mm	3 winding units	8995302 Per door 209
	Retrofit kit	2 winding units	8995303 Per door 139
	From LH 2301 mm	3 winding units	8995304 Per door 209

Chamfered bottom profile		£
Roller garage door RollMatic with chamfered bottom profile (not available in the surface finishes Golden Oak and Rosewood)		
	In black	Per m 489
	In door colour	Per m 489



Symmetrical curtain cover		£
Symmetrical curtain cover for a visually balanced appearance		
<u>Note:</u> not possible with external roller garage doors LB > 5750 mm		
	Per door	No surcharge

Additional fascia panel		£
Reinforcement of the fascia panel		
Note: Required for fitting in the opening!	In door colour	Per m 100
▶ State additional fascia panel height (SBH) and width!		

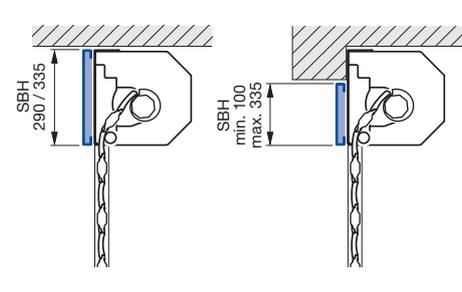
Note:
State on door order, subsequent fitting is not possible.

SBH Fascia panel height
Min. At least
Max. Maximum

Optional extras	Article no.	£
 <p>Glazing element With clear synthetic pane, window cut-out 112 × 33 mm, black glazing frame on exterior, transparent on interior (maximum 10 sections per door, number of glazing elements depending on the door width)</p>		Per m 44
 <p>Ventilation grille Black plastic Ventilation cross-section: approx. 13 cm²/grille (maximum of 10 sections per door, number of ventilation grilles depending on the door width)</p>		Per m 44
 <p>Brush seal for fascia panel</p>	LB up to 3000 mm	8991423 Per door 23
	LB from 3000 mm to 5000 mm	8991424 Per door 33
Aluminium cover for side guides (as standard with external roller garage door)		Per m 70

Optional extras


For RollMatic roller garage door including operator



2-coloured roller garage door RollMatic				£
After technical clarification!				
	2-coloured roller garage door – frame and door curtain		Per door	171
	2-coloured door curtain (The individual section is only ever in one colour on the inside and outside)		Per door	474
Cleaning and care		Article no.		£
Cleaning cloth	Cleaning cloth (size 40 x 50 cm) Ready-to-use microfibre cloth for matt, glossy, film-coated and printed surfaces.	4018988	Each	11
Cleaning and maintenance set	Contents 1 x cleaner, 1 x cleaning sponge, 1 x 2-in-1 polish, 1 x polishing sponge, 2 x microfibre cloth, 1 x oil	4020356	Per set	75
Optional extras for manually operated version		Article no.		£
	Recessed handle	8991583	Each	168
	Pull cord	8991581	Each	35
Accessories for operator RollMatic		Article no.		£
	Accessory bag for permanent connection	4510779	Each	10
	Motor connection line, 10 m	4510774	Each	42
	Acoustic anti-lift kit	4510872	Each	93
	Emergency battery HNA 18-4	4510095	Each	278
	One-way photocell EL 31 as additional safety equipment	436210	Each	187
Emergency release				£
	Exterior emergency release for internal roller garage door	436526	Each	139
Exterior emergency release for external roller garage door	Exterior emergency release	436526	Each	139
	Accessory bag for double secured release SE	437728	Each	11
	Bowden cable, length 1 m, for double secured release SE	437986	Each	19
	Note: All 3 articles are required for the external roller garage door!			
Bottom profile with closing edge safety device				£
	Bottom profile retrofit kit with closing edge safety device <i>Notes:</i> with doors LB > 5000 mm high bottom profile in black	8992141	Each	507
Retrofit kit for operator RollMatic series 2				£
	Retrofit kit for operator RollMatic series 2 for internal roller garage door, without SKS	8994670	Each	1510
	Retrofit kit for operator RollMatic series 2 for external roller garage door, without SKS	8994672	Each	1510
	Retrofit kit for operator RollMatic series 2, with SKS	8994671	Each	2027
Further accessories for operator RollMatic		See door operators section in the 01-25 A Dealer Price List		

Optional extras


For RollMatic roller garage door including operator



Fixed element

£

Element infill with roller garage door sections in RollMatic look. Position of sections does not match the roller garage door RollMatic. Frame made of aluminium extrusion profile. Coated in colour of the element infill. Decopaint and Decograin colours matching the Decopaint / Decograin surface finish. RAMB max. 6000 mm. Reinforcement profile with BRB \geq 5001 mm.

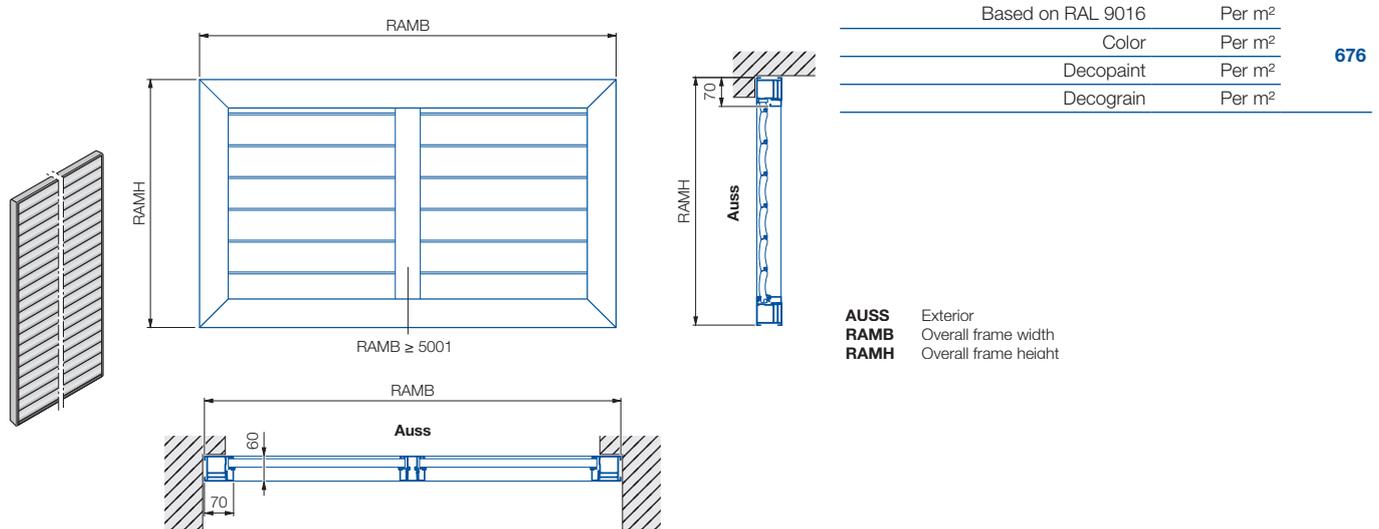

Manufacturing dimensions

- Without reinforcement profile RAMB \leq 5000 mm = RAMH min. 360 mm
- With reinforcement profile RAMB \geq 5001 mm = RAMH min. 470 mm

Note:

Only one side (width or height) may be > 2500 mm!

Roller garage door RollMatic T

Including tubular drive

Product description and fitting dimensions



General rules

Roller garage door with tubular drive and emergency crank handle for private use. With integral catch safety device and closing edge safety device as standard. Version as internal or external roller garage door, max. 10 door cycles per day according to warranty conditions.

- Wind load class 3 to LB 3000 mm (FS 75 without wind lock)
- Wind load classes with wind locks (FS 105 from LB 3001 mm):
 - LB 3000 mm to 4000 mm = wind load class 4
 - LB 4000 mm to 4500 mm = wind load class 3
 - LB 4500 mm to 5000 mm = wind load class 2

Frame

- Aluminium extrusion profile side guides with integrated strip brush profile and brush profile. Coating in door curtain colour.
- Lintel cladding made of sheet steel in door curtain colour.
- Curtain cover made of sheet steel, coated in door curtain colour.
- Side cladding of internal roller garage doors made of sheet steel, coated in door curtain colour.
- Side cladding of external roller garage doors made of aluminium, coated in door curtain colour.
- Side guides, lintel and curtain cover coated in basic colour of the timber finish in Decopaint / Decograin version.

Door curtain

Rolled aluminium profile foamed with polyurethane rigid foam with plastic runners, 77 mm section height without ribbing in the profile. Coloured versions with two-layer coil coating with a paint system based on a high-quality polyurethane coated with polyamide.

Note:

All Hörmann roller garage doors correspond to their technical properties and use state-of-the-art paint systems. Pressure marks and abrasive wear are design-related and cannot be avoided. They do not impair the function and durability of the roller garage door.

Surface coating

Version in standard colours

Interior and exterior of door curtain:

- Standard colours based on the RAL colour chart:

RAL 9016	Traffic white	RAL 7035	Light grey
RAL 1015	Light ivory	RAL 7038	Agate grey
RAL 3003	Ruby red	RAL 8028	Terra brown
RAL 3004	Purple red	RAL 9001	Cream
RAL 5011	Steel blue	RAL 9005	Jet black
RAL 6005	Moss green	RAL 9006	White aluminium*
RAL 7015	Slate grey	RAL 9007	Grey aluminium*
RAL 7016	Anthracite grey		
- Chartwell Green
- Noir 2100 Sablé (Anthracite metallic) – at a surcharge

Note:

Dark colours should not be used for doors that are exposed to the sun.

* IMPORTANT:

Despite the use of state-of-the-art colour coating systems, we cannot rule out colour deviations, specifically in metallic colours such as RAL 9006 or 9007.

Decopaint version with paint in timber design look

Door curtain with paint on the outside and timber design look on the inside
Curtain cover in the basic colour of the Decopaint coating:

- **Golden Oak** – medium brown, yellow-gold surface with vibrant oak character
- **Rosewood** – reddish-brown stripey timber design

Decograin version with plastic film coating with timber design (not available for external roller garage doors)

Door curtain, exterior:

- Coated with UV-resistant synthetic film with timber design with embossed grain for an authentic timber character.
 - **Golden Oak** – medium brown, yellow-gold surface with vibrant oak character
 - **Rosewood** – reddish-brown stripey timber design

Door curtain, interior:

- Terra brown coating based on RAL 8028

Operator data and control electronics

- Tubular drive with emergency hand chain drive and crank handle drive for operation in case of power failure
 - Tubular drive technology with mechanically adjustable end-of-travel position (standard)
 - Tubular drives with electronically adjustable end-of-travel positions (optional)
- Door cycles (Open / Close)
 - max. 10 per day / max. 3 per hour
 - On-time of tubular drive max. 4 min. per hour
- Operator possible with impulse operation on left or right side (querying of the door position not possible)
- Control housing with integrated LED light
- Operation with 2 push buttons on the control housing
- Operation via hand transmitter 868 MHz BiSecur with 2 x hand transmitter HSE 4 BS (standard)
- Optical closing edge safety device installed at the factory in the bottom profile ensures safety as per DIN EN 13241-1
 - Closing edge safety device with spiral cable (standard)
 - Radio closing edge safety device (optional, receiver integrated in control housing)
- Adjustable reversing procedure
- Adjustable pre-warning phase
- Connection of external illumination possible
- Adjustable automatic timer
- Connecting option for one-way photocell EL 31

Standard equipment

- Door including tubular drive, emergency hand chain drive and complete curtain cover as standard.
- Control with 2 control buttons in the cover and integrated radio receiver 868 MHz rolling code
- 2 x HSE 4 BS BiSecur 868 MHz hand transmitter
- Connecting lead with plug
- Optical closing edge safety device (with spiral cable) with photocell in bottom profile
- External roller garage door with emergency release lock

Delivery

2-part packaging incl. operator

Size range

Clear height (L-H) = ordering size height (BMH)	3100	A	–
	2500		C
	2301	B	D
	2300		
1200			
		1000 ... 3000	3001 ... 5000
		Clear width (LB) = ordering size width (BMB)	

- A** EBT/S 335, LB ≤ 3000 = FS 75, shaft 70 mm, without wind lock
- B** EBT/S 290, LB ≤ 3000 = FS 75, shaft 70 mm, without wind lock
- C** EBT/S 335, LB > 3000 = FS 105, shaft 80 mm, with wind lock
- D** EBT/S 290, LB > 3000 = FS 105, shaft 80 mm, with wind lock


Roller garage door RollMatic T

Including tubular drive


Product description and fitting dimensions



Internal roller garage door – fitting behind the opening

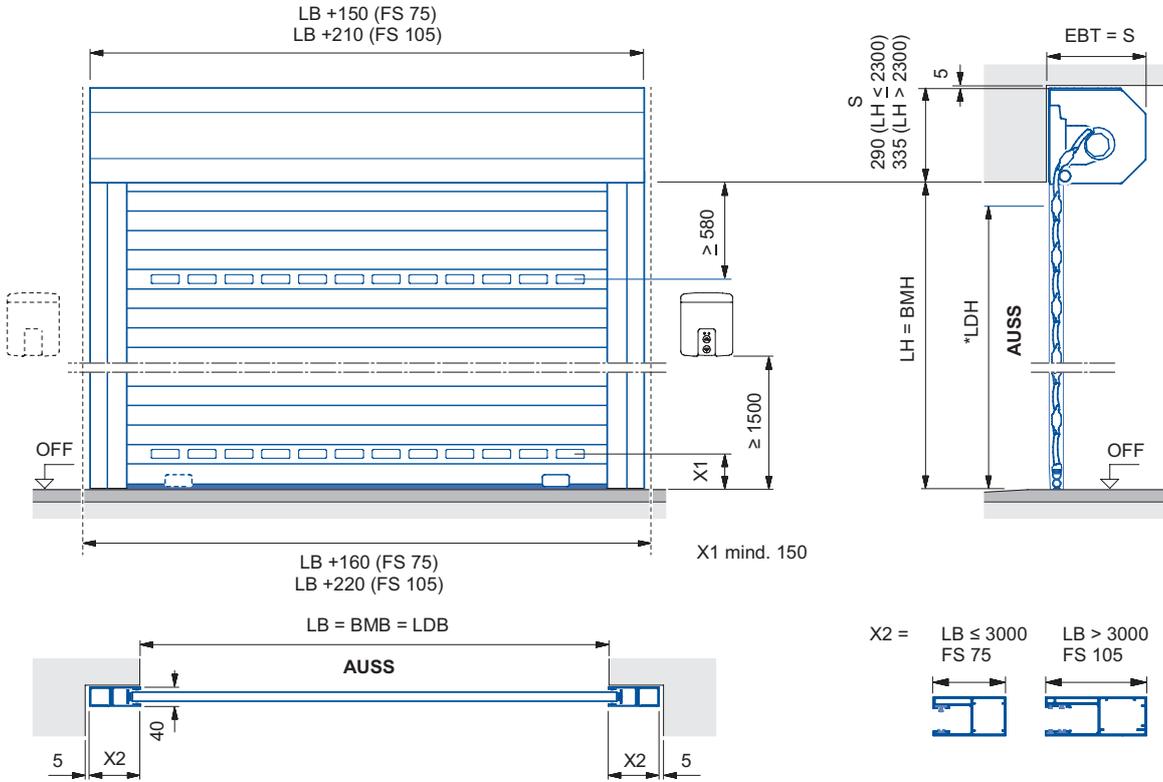

Internal roller garage door – fitting in the opening

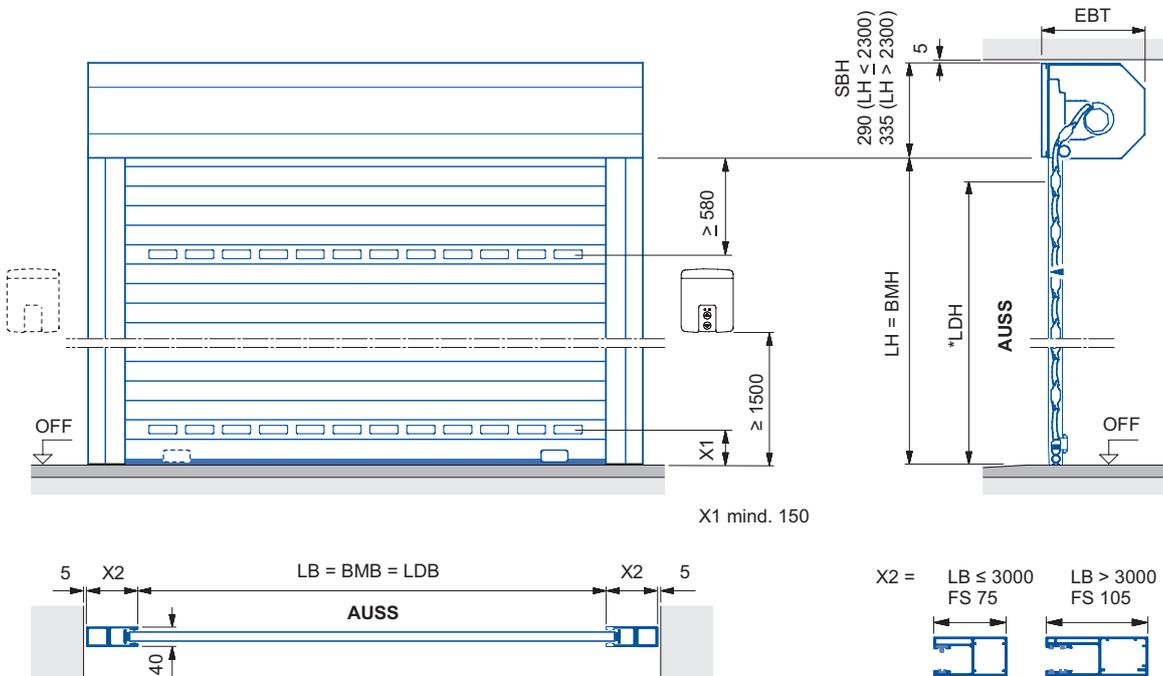

An additional fascia panel is required!

AR External rollina shutter
AUSS Exterior
BMB Ordering size width
BMH Ordering size height
EBT fitting depth
FS Side guide

IR Internal rollina shutter
LB Clear width
LDB Clear passage width
LDH Clear passage height
LH Clear height
S required headroom


SBB Additional fascia panel width
SBH Additional fascia panel height
min. Minimum
max. Maximum
OFF Finished floor level (FFL)

* LDH = LH - 70 (FS 75)
= LH - 110 (FS 105)


Roller garage door RollMatic T

Including tubular drive


Product description and fitting dimensions



External roller garage door – fitting in front of the opening

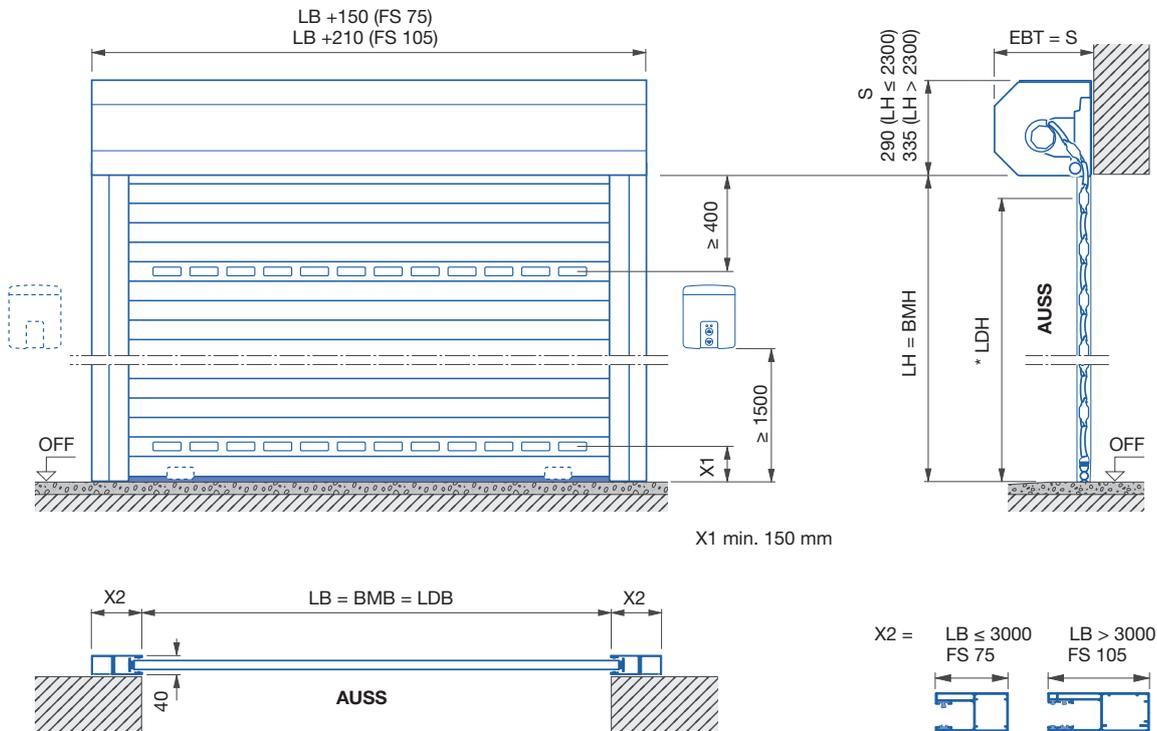

Glazing and/or ventilation grille arrangement (optional)

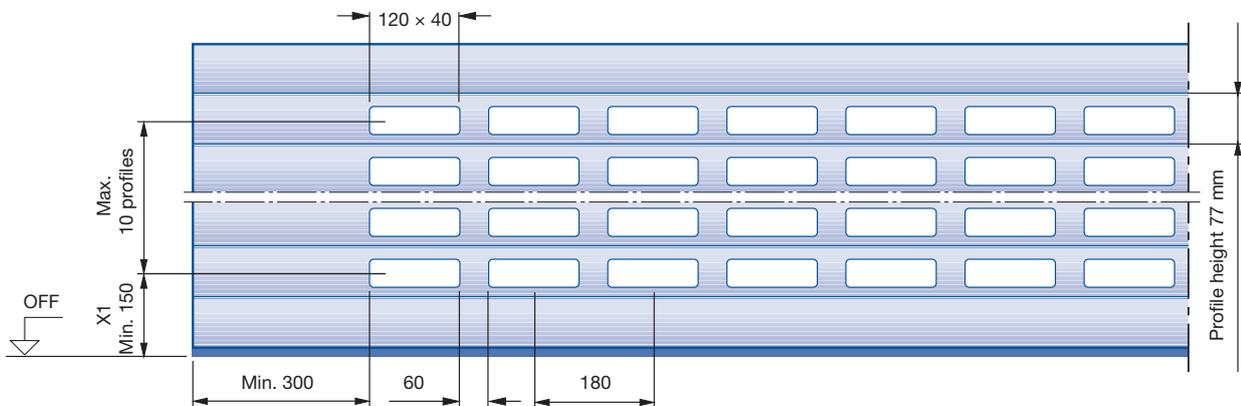

Note:

- Glazing/ventilation arrangement is only possible starting at the 2nd section from the bottom.
- For technical reasons, the glazing/ventilation arrangement in the curtain is only possible starting at the 8th visible section from the top.

AR	External roller garage door	FS	Side guide	LH	Clear height	max.	Maximum
AUSS	Exterior	IR	Internal roller garage door	S	Required headroom	OFF	Finished floor level
BMB	Ordering size width	LB	Clear width	SBB	Additional fascia panel width		
BMH	Ordering size height	LDB	Clear passage width	SBH	Additional fascia panel height	* LDH	= LH - 70 (FS 75) = LH - 110 (FS 105)
EBT	Fitting depth	LDH	Clear passage height	min.	Minimum		

Please note that all prices within this price list will increase by 3.8% from 01.01.2026

Roller garage door RollMatic T

Including tubular drive

Size range and prices



For a product description, see from page 28



Exterior
Standard colours

Prices for internal roller garage door RollMatic T – version with tubular drive

Clear height (LH) = ordering size height (BMH)	3100	2438	2526	2593	2674	2674	2762	2843	2930	3039	3581	3661	3747	3833						
	3000	2438	2526	2593	2674	2674	2762	2843	2930	3039	3581	3661	3747	3833						
	2875	2438	2526	2593	2674	2674	2762	2843	2930	3039	3581	3661	3747	3833	3933					
	2750	2403	2481	2541	2621	2621	2700	2780	2855	2956	3385	3464	3542	3620	3712	3781				
	2675	2403	2481	2541	2621	2621	2700	2780	2855	2956	3385	3464	3542	3620	3712	3781				
	2625	2403	2481	2541	2621	2621	2700	2780	2855	2956	3385	3464	3542	3620	3712	3781	3877			
	2500	2363	2434	2491	2562	2562	2630	2709	2780	2872	3294	3367	3438	3513	3686	3774	3848	3916		
	2375	2352	2422	2476	2544	2544	2621	2690	2762	2851	3270	3338	3409	3479	3654	3739	3808	3883		
	2250	2321	2391	2438	2504	2504	2569	2640	2704	2789	3203	3270	3336	3404	3467	3548	3616	3680		
	2125	2305	2366	2415	2476	2476	2538	2604	2666	2747	3157	3221	3282	3349	3409	3488	3548	3616		
	2000	2294	2356	2403	2465	2465	2526	2585	2645	2732	3136	3196	3259	3321	3382	3461	3518	3581		
	1750	2266	2321	2359	2417	2417	2476	2534	2593	2669	3065	3123	3178	3234	3294	3364	3420	3479		
	1500	2229	2283	2310	2363	2363	2415	2465	2516	2589	2975	3027	3080	3126	3178	3245	3294	3349		
	1200																			
			1000	1250	1500	1750	1900	2000	2250	2500	2750	3000	3250	3500	3750	4000	4250	4500	4750	5000
			Clear width (LB) = ordering size width (BMB)																	

Only available in the priced size range listed! (Minimum production dimensions BR 1000 x 1200 mm)

Surfaces		£
Noir 2100 Sablé (Anthracite metallic)		39
Decopaint	Painted in timber design look (Golden Oak or Rosewood) on inside and outside	39
Decograin	Plastic film coating in timber design look (Golden Oak or Rosewood) on outside	72
Note: External roller garage door not available with Decograin surface finish!		

Please note that all prices within this price list will increase by 3.8% from 01.01.2026

Roller garage door RollMatic T

Including tubular drive

Surcharges for optional extras



External rolling shutter				£	
Version as external roller garage door (fitting in front of the opening)					
Note:		Per door		69	
A second access point is required for installation as an external roller garage door.					
Radio		Article no.	£		
Radio receiver 868 MHz BiSecur with 1 × hand transmitter HSE 4 BS 868 MHz			Per door	Standard	
Operator		£			
Operator with mechanically adjustable end-of-travel position			Per door	Standard	
Operator with electronically adjustable end-of-travel positions			Per door	341	
NEW. Somfy operator 40 Nm			Per door	374	
NEW. Somfy operator 80 Nm			Per door	374	
Safety edge		£			
Closing edge safety device with spiral cable			Per door	Standard	
Closing edge safety device with radio (receiver integrated in control housing)			Per door	246	
Fitting compensation set		Article no.	£		
(to accommodate for unevenness on the building structure, recommended when fitting behind / in front of the opening)					
Fitting compensation set LH ≤ 2300	(FS 75)	8991193	Per set	66	
	(FS 105)	8991235	Per set	66	
Fitting compensation set LH > 2300	(FS 75)	8991194	Per set	71	
	(FS 105)	8991236	Per set	71	
DuraBelt – winding unit		Article no.	£		
We recommend the use of the DuraBelt winding unit to reduce design-related abrasion on the door curtain to a minimum	LB 1000 – 1600 mm	2 winding units	Surcharge per door	92	
	LB 1601 – 3000 mm	3 winding units	Surcharge per door	138	
	LB 3001 – 5000 mm	5 winding units	Surcharge per door	230	
	Retrofit kit	2 winding units	8995301	Per door	139
	Up to LH 2300 mm	3 winding units	8995302	Per door	209
	Retrofit kit	2 winding units	8995303	Per door	139
From LH 2301 mm:	3 winding units	8995304	Per door	209	
NEW. Belt fitting		Article no.	£		
Belt fitting set		8992114	Per set	41	
Additional fascia panel		£			
Reinforcement of the fascia panel					
Notes:		In door colour	Per m	100	
<ul style="list-style-type: none"> • Required for fitting in the opening! • State on door order, retrofitting is not possible! 					
▶ State additional fascia panel height (SBH) and width!					
AR	External rolling shutter	SBH	Additional fascia panel height		
IR	Internal rolling shutter	min.	Minimum		
LB	Clear width				
SBH	Additional fascia panel width				


Please note that all prices within this price list will increase by 3.8% from 01.01.2026


Roller garage door RollMatic T

Including tubular drive

Surcharges for optional extras



Emergency release		Article no.		£
 <p>Only for internal roller garage door!</p>	Exterior emergency release	8991692	Each	284
	<p>Note:</p> <ul style="list-style-type: none"> LH min. 1700 mm Wall thickness ≤ 500 mm 			

Optional extras		Article no.		£	
	<p>Glazing element With clear synthetic pane, window cut-out 112 × 33 mm, black glazing frame on exterior, transparent on interior (maximum 10 sections per door, number of glazing elements depending on the door width)</p>		Per m	44	
	<p>Ventilation grille Black plastic Ventilation cross-section: approx. 13 cm²/grille (maximum of 10 sections per door, number of ventilation grilles depending on the door width)</p>		Per m	44	
	Brush seal for fascia panel	LB up to 3000 mm	8991423	Per door	23
		LB from 3000 mm to 5000 mm	8991424	Per door	33

Cleaning and care		Article no.		£
Cleaning cloth	<p>Cleaning cloth (size 40 × 50 cm) Ready-to-use microfibre cloth for matt, glossy, film-coated and printed surfaces.</p>	4018988	Each	11
Cleaning and maintenance set	<p>Contents</p> <ul style="list-style-type: none"> 1 × cleaner, 1 × cleaning sponge, 1 × 2-in-1 polish, 1 × polishing sponge, 2 × microfibre cloth, 1 × oil 	4020356	Per set	75

Key switch for impulse operation from outside		Article no.		£
<ul style="list-style-type: none"> Impulse Press-and-hold / push-to-lock function adjustable With 2 m connecting lead, 2-wire 2 impulse buttons for controlling 2 operators or for choosing direction Max. switching capacity: <ul style="list-style-type: none"> – 30 V DC / 2.5 A (resistive load) – 230 V AC / 500 W (resistive load) Protection category IP 65 	 <p>STUP 50 (recessed): Dimensions (W × H × D): 80 × 80 × 15 mm incl. recessed junction box: Ø 60 mm, depth 55 mm</p>	4511648	Each	86
	 <p>STAP 50 (surface-mounted): Dimensions (W × H × D): 80 × 80 × 65 mm</p>	4511650	Each	90

Good reasons to try Hörmann sectional garage doors



Doors in matching design

NEW. Plaingrain* surface finish

* Available from 01.09.2025

HÖRMANN

Garage horizontal door RollMatic OD

Including side operator ProMatic

Product description



General rules

Spring-compensated garage horizontal door for private use. As standard, when the Hörmann operator ProMatic is used – max. 10 door cycles per day according to the warranty conditions.

Frame

- Vertical side guides made of aluminium extrusion profiles with integrated brush seal, coated in door curtain colour. Horizontal guide rails and fascia panel made of aluminium extrusion profile, coated in the door curtain colour Decopaint / Decograin version – colours matching the Decopaint / Decograin surface finish.

Door curtain

- Rolled aluminium profile foamed with polyurethane rigid foam with rollers, profile height 77 mm. Coloured versions with two-layer coil coating with a paint system based on a high-quality polyurethane coated with polyamide.
- Bottom profile with bottom seal.

Note:

All Hörmann roller garage doors correspond to their technical properties and use state-of-the-art paint systems. Pressure marks and abrasive wear are design-related and cannot be avoided. They do not impair the function and durability of the roller garage door.

Surface coating

Version in standard colours

Interior and exterior of door curtain:

- Standard colours based on the RAL colour chart:

RAL 9016 Traffic white	RAL 7016 Anthracite grey
RAL 1015 Light ivory	RAL 7035 Light grey
RAL 3003 Ruby red	RAL 7038 Agate grey
RAL 3004 Purple red	RAL 8028 Terra brown
RAL 5011 Steel blue	RAL 9001 Cream
RAL 6005 Moss green	RAL 9005 Jet black
RAL 7015 Slate grey	RAL 9006 White aluminium*
	RAL 9007 Grey aluminium*
- Chartwell Green
- Noir 2100 Sablé (Anthracite metallic) – at a surcharge

Note:

Dark colours should not be used for doors that are exposed to the sun.

* IMPORTANT:

Despite the use of state-of-the-art colour coating systems, we cannot rule out colour deviations, specifically in metallic colours such as RAL 9006 or 9007.

Decopaint version with paint in timber design look

Interior and exterior of door curtain:

- **Golden Oak** – medium brown, yellow-gold surface with vibrant oak character
- **Rosewood** – reddish-brown stripey timber design

Decograin version with plastic film coating with timber design

Door curtain, exterior:

- Coated with UV-resistant synthetic film with timber design with embossed grain for an authentic timber character.
 - **Golden Oak** – medium brown, yellow-gold surface with vibrant oak character
 - **Rosewood** – reddish-brown stripey timber design

Door curtain, interior:

- Terra brown coating based on RAL 8028

Counterbalance

Tension spring system with lateral integral multiple tension spring assemblies. Transmission of forces via a cable, including cable guide and safety catch.


Closing devices

Locking with garage door operator.

Delivery

1 unit including operator

Glazing and / or ventilation grille arrangement (optional equipment)

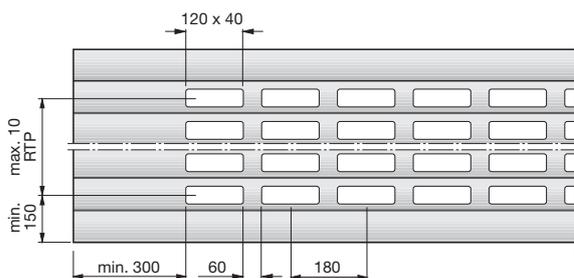


Note:

Glazing / ventilation grille arrangement is only possible starting at the 2nd section from the bottom.

Operator (side operator)

- As standard with garage door operator ProMatic
- Optionally with garage door operator SupraMatic E for a surcharge.
- Operator possible on the left or right, please state on order!

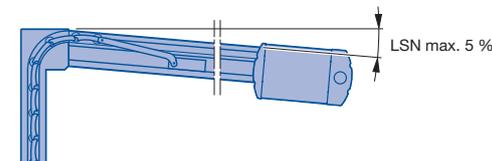

AUSS	Exterior
BMB	Ordering size width
BMH	Ordering size height
LE	Distance back with operator
LB	Clear width
LH	Clear height
LDB	Clear passage width
LDH	Clear passage height
LMB	Structural opening width
LSN	Track slope
max.	Maximum
min.	At least
OFF	Finished floor level
RAMB	Overall frame width
RAMH	Overall frame height
S	Lintel




Garage horizontal door RollMatic OD

Including side operator ProMatic




Fitting dimensions



Fitting behind the opening

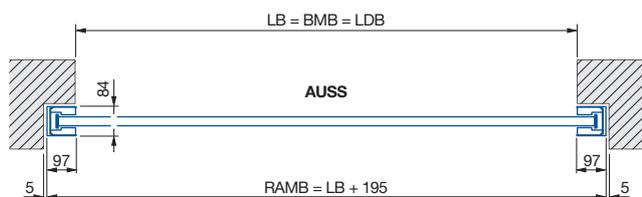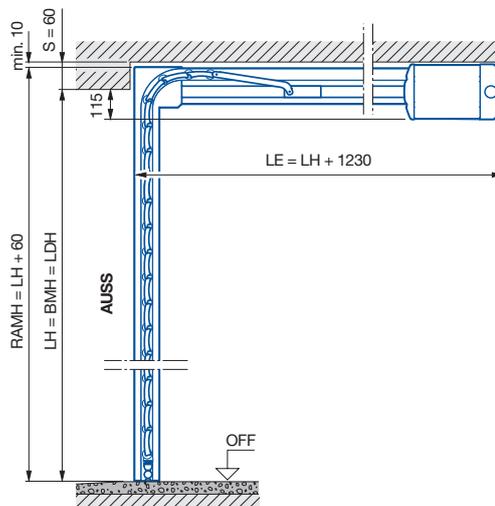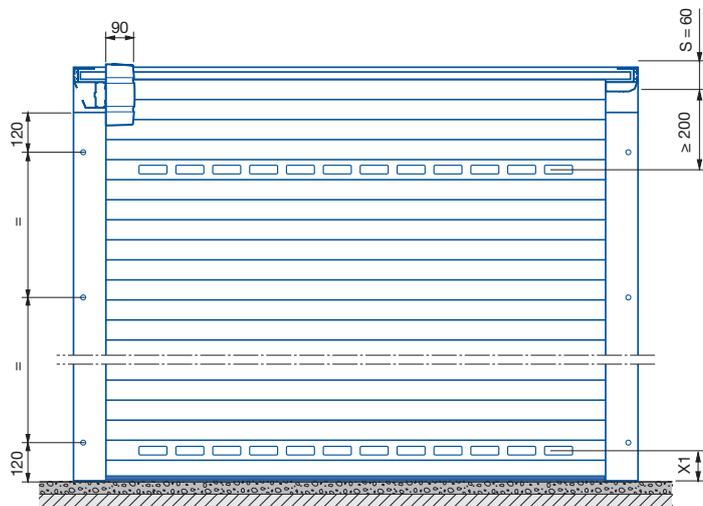


Fitting in the opening

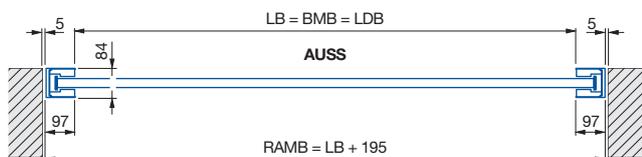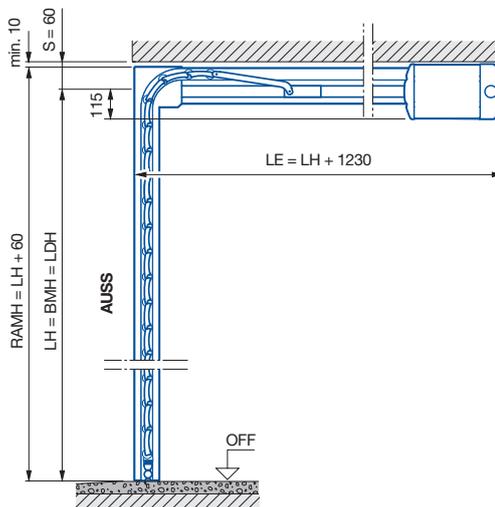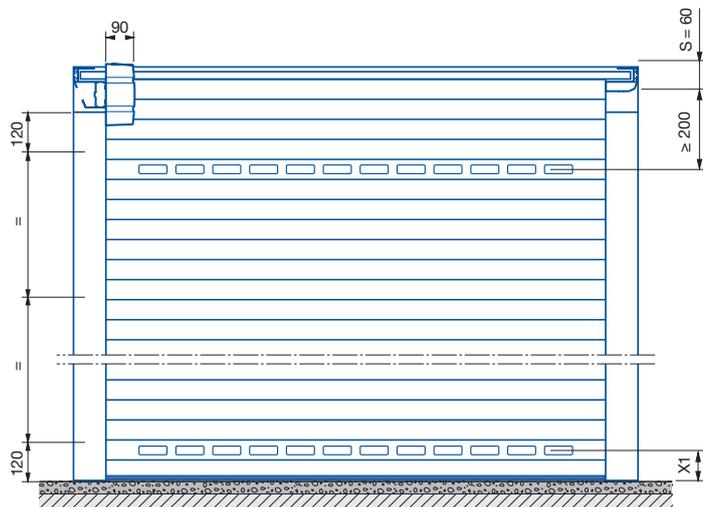




Garage horizontal door RollMatic OD

Including side operator ProMatic

Fitting dimensions



Flush fitting in the opening with panel 95

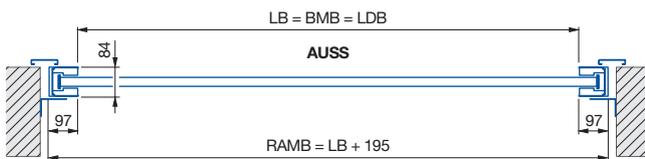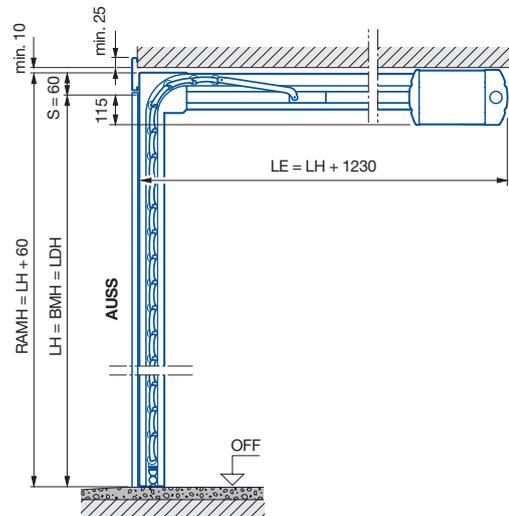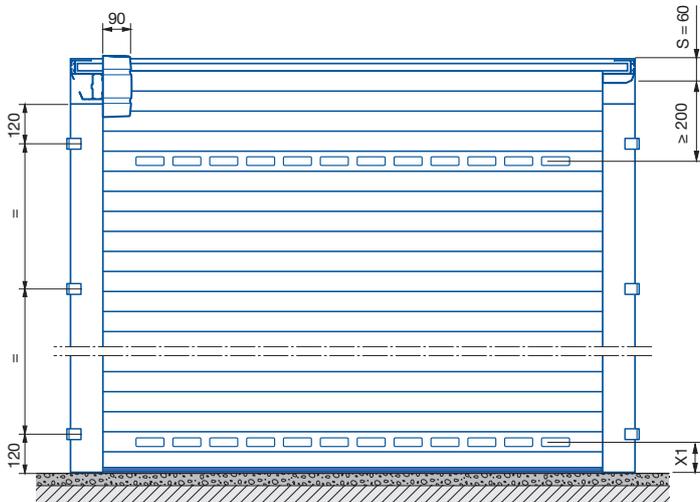

LB max. 3150
LH max. 2700
X1 min. 150

- AUSS** Exterior
- BMB** Ordering size width
- BMH** Ordering size height
- LE** Distance back with operator
- LB** Clear width
- LH** Clear height
- LDB** Clear passage width
- LDH** Clear passage height
- LMB** Structural opening width
- LSN** Track slope
- max.** Maximum
- min.** At least
- OFF** Finished floor level
- RAMB** Overall frame width
- RAMH** Overall frame height
- S** Lintel

Please note that all prices within this price list will increase by 3.8% from 01.01.2026

Garage horizontal door RollMatic OD

Including side operator ProMatic

Size range and prices



For a product description, see from page 36



Exterior
White or Colour

(same price)

Prices for garage horizontal doors RollMatic OD

Clear height (LH) = ordering size height (BMH)	Clear width (BR) = ordering size width (BMR)									
	1250	1500	1750	2000	2250	2500	2750	3000	3250	3500
3000				2851	2923	3001	3068	3143	3210	3286
2875				2799	2864	2926	3001	3074	3142	3204
2750				2748	2801	2866	2938	3006	3069	3130
2625				2688	2751	2800	2871	2941	3000	3054
2500	2377	2373	2667	2721	2783	2850	2920	2976	3038	
2375	2317	2347	2515	2566	2629	2687	2746	2795	2851	
2250	2261	2316	2376	2426	2480	2540	2591	2643	2698	
2125	2220	2263	2317	2368	2419	2475	2525	2568	2626	
2000	2175	2215	2260	2308	2356	2409	2457	2503	2553	
1875	2127	2189	2209	2262	2316	2359	2412	2465	2515	
1700										

Only available in the priced size range listed! (Minimum production dimensions BR 1250 x 1700 mm)

Surfaces	£
Noir 2100 Sablé (Anthracite metallic)	£ per m ² 39
Decopaint Painted in timber design look (Golden Oak or Rosewood) on inside and outside	£ per m ² 39
Decograin Plastic film coating in timber design look (Golden Oak or Rosewood) on outside	£ per m ² 72
Note: External roller garage door not available with Decograin surface finish!	

SupraMatic E, series 4 £



Optionally with garage door operator SupraMatic E, series 4 Surcharge **184**
2 x 4-button hand transmitter HSE 4 BS, textured surface (black) with chrome caps

ProMatic Akku, series 4 Article no. £



Optionally with garage door operator ProMatic Akku, series 4 Surcharge **416**
4-button hand transmitter HSE 4 BS, textured surface with plastic caps (black)
For a product description, see door operators section in the 01-25 A

Special accessories	Article no.	Each	£
Replacement battery WA 24 (For a product description and possible number of door cycles, see door operators section in the 01-25 A)	438703	Each	389
Solar module SM 1-2 (For a product description, see door operators section in the 01-25 A)	4511942	Each	508

2-coloured overhead garage door RollMatic OD See page 40


Optional extras for garage horizontal door RollMatic OD See door operators section in the 01-25 A Dealer Price List

Please note that all prices within this price list will increase by 3.8% from 01.01.2026

Optional extras

For garage horizontal door RollMatic OD including side operator ProMatic



Optional extras		£
	Glazing element With clear synthetic pane, window cut-out 112 x 33 mm, black glazing frame on exterior, transparent on interior (maximum 10 sections per door, number of glazing elements depending on the door width)	Per m 44
	Ventilation grille Black plastic Ventilation cross-section: approx. 13 cm ² /grille (maximum of 10 sections per door, number of ventilation grilles depending on the door width)	Per m 44

2-coloured overhead garage door RollMatic OD		£
	2-coloured roller garage door – frame and door curtain	Per door 171
After technical clarification!	2-coloured door curtain (The individual section is only ever in one colour on the inside and outside)	Per door 474

Retrofit fascias for flush fitting

Set: fascia frame OD

As cover for lintel and frame with flush-fitting installation and for renovations

NEW. Set 1: For use with doors up to LB max. 3150 mm and LH max. 2700 mm	White, based on RAL 9016 or Color	Per set 378
---	-----------------------------------	--------------------

Comprising:

- 2 panels, width 95 mm, length 2800 mm each
- 1 panel, width 95 mm, length 3200 mm
- Including additional fixing material for panel and door
- 2 plastic panel shoes (black)


NEW. Set 2: For use with doors up to LB max. 3500 mm and LH max. 2700 mm	White, based on RAL 9016 or Color	Per set 413
---	-----------------------------------	--------------------

Comprising:

- 2 panels, width 95 mm, length 2800 mm each
- 1 panel, width 95 mm, length 5500 mm
- Including additional fixing material for panel and door
- 2 plastic panel shoes (black)

Note:

The vertical tracks and the fascia panel are pre-drilled at the factory if this fitting is selected.

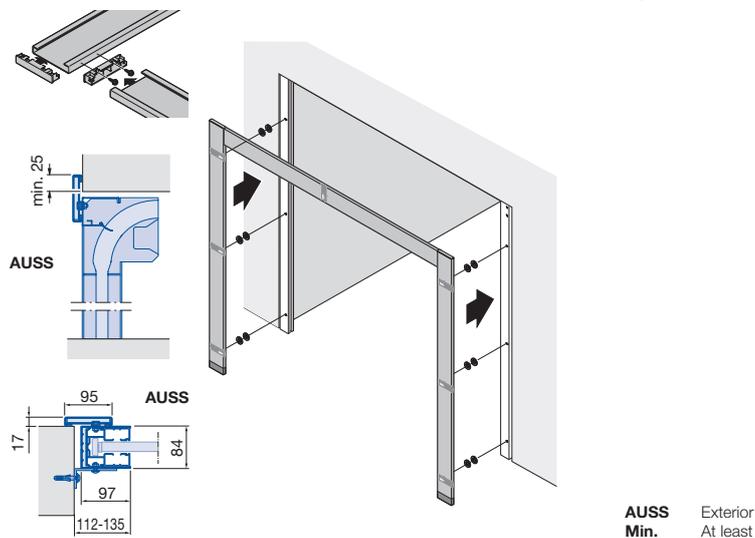

Cleaning and care		Article no.	£
Cleaning cloth	Cleaning cloth (size 40 x 50 cm) Ready-to-use microfibre cloth for matt, glossy, film-coated and printed surfaces.	4018988	Each 11
Cleaning and maintenance set	Contents 1 x cleaner, 1 x cleaning sponge, 1 x 2-in-1 polish, 1 x polishing sponge, 2 x microfibre cloth, 1 x oil	4020356	Per set 75

Emergency release NET 4

(required if there is no second entrance)

See door operators section in the 01-25 A Dealer Price List

Accessories for operator ProMatic / SupraMatic E

See door operators section in the 01-25 A Dealer Price List

NT 60 side doors

For roller garage door RollMatic / garage horizontal door RollMatic OD
Single-leaf side doors with corner frame made of aluminium profiles



Product description

Subject to changes

General rules

Door set for private use

Notes:

- Doors cannot be driven!
- For internal fitting please state when ordering, subsequent change is not possible.

Door leaf and frame

Door leaf frame and frame made of aluminium extrusion profiles (normal profile, without thermal break), depth 60 mm, 3-sided double door seal, double lip seal in the threshold area.

Door infill: roller garage door sections in RollMatic look.

Rolled aluminium profile foamed with polyurethane rigid foam, profile height 77 mm. Coloured versions with two-layer coil coating with a paint system based on a high-quality polyurethane coated with polyamide.

Position of sections does not match the roller garage door RollMatic. Glazing and ventilation grilles arranged as in the roller garage door RollMatic.

Frame including plug holes under the cover strip.


Thermal insulation value*:

- Fitted side door NT 60 $U = 5.6 \text{ W}/(\text{m}^2 \cdot \text{K})$
- * In relation to door size 1250 x 2200 mm


Version – wide leaf frame

Lever height: 1050 mm

Opening inwards



Opening outwards



Fittings and closing devices

- Lever handle set with oval rose escutcheons in black plastic, prepared for profile cylinder
- Lock with profile cylinder, keys to differ or keys to pass
- Hinges optionally in black, white or aluminium natural finish

The handle set version can be selected for a surcharge.

Surface coating

Color based on RAL

- Door infill in Color on interior and exterior
- Standard colours based on the RAL colour chart:

RAL 9016	Traffic white	RAL 7035	Light grey
RAL 1015	Light ivory	RAL 7038	Agate grey
RAL 3003	Ruby red	RAL 8028	Terra brown
RAL 3004	Purple red	RAL 9001	Cream
RAL 5011	Steel blue	RAL 9005	Jet black
RAL 6005	Moss green	RAL 9006	White aluminium*
RAL 7015	Slate grey	RAL 9007	Grey aluminium*
RAL 7016	Anthracite grey		
- Chartwell Green
- Noir 2100 Sablé (Anthracite metallic) – at a surcharge

* IMPORTANT:

Despite the use of state-of-the-art colour coating systems, we cannot rule out colour deviations, specifically in metallic colours such as RAL 9006 or 9007.

Decopaint paint

Decopaint version with paint on the outside and timber design look on the inside

- **Golden Oak** – medium brown, yellow-gold surface with vibrant oak character
- **Rosewood** – reddish-brown stripey timber design

Decograin plastic film coating

Decograin version with plastic film coating with timber design

- **Exterior:** Coated with UV-resistant timber design plastic film with embossed timber structure for an authentic timber character.
 - **Golden Oak** – medium brown, yellow-gold surface with vibrant oak character
 - **Rosewood** – reddish-brown stripey timber design
- **Interior:** coating in RAL 8028 Terra brown

Notes on surface coatings

Deviations in colour are to be expected due to the use of different base materials, such as aluminium and steel, and textures, as well as due to varying production processes and locations.

Despite the use of state-of-the-art colour coating systems, colour deviations cannot be ruled out, specifically in metallic colours such as RAL 9006.

Glazing / ventilation grille

- Glazing / ventilation grille optional
- Not possible in the bottom section and in the lock area (13th and 14th section from the bottom)

NT 60 side doors

For roller garage door RollMatic / garage horizontal door RollMatic OD
Single-leaf side doors with corner frame made of aluminium profiles



Product description

Subject to changes

Fitting dimensions

Internal fitting (opening inwards)


Matching
Internal roller garage
doors RollMatic
Garage horizontal doors
RollMatic OD

Matching
External roller garage
doors RollMatic

External fitting (opening outwards)

Matching
Internal roller garage
doors RollMatic
Garage horizontal doors
RollMatic OD

Matching
External roller garage
doors RollMatic

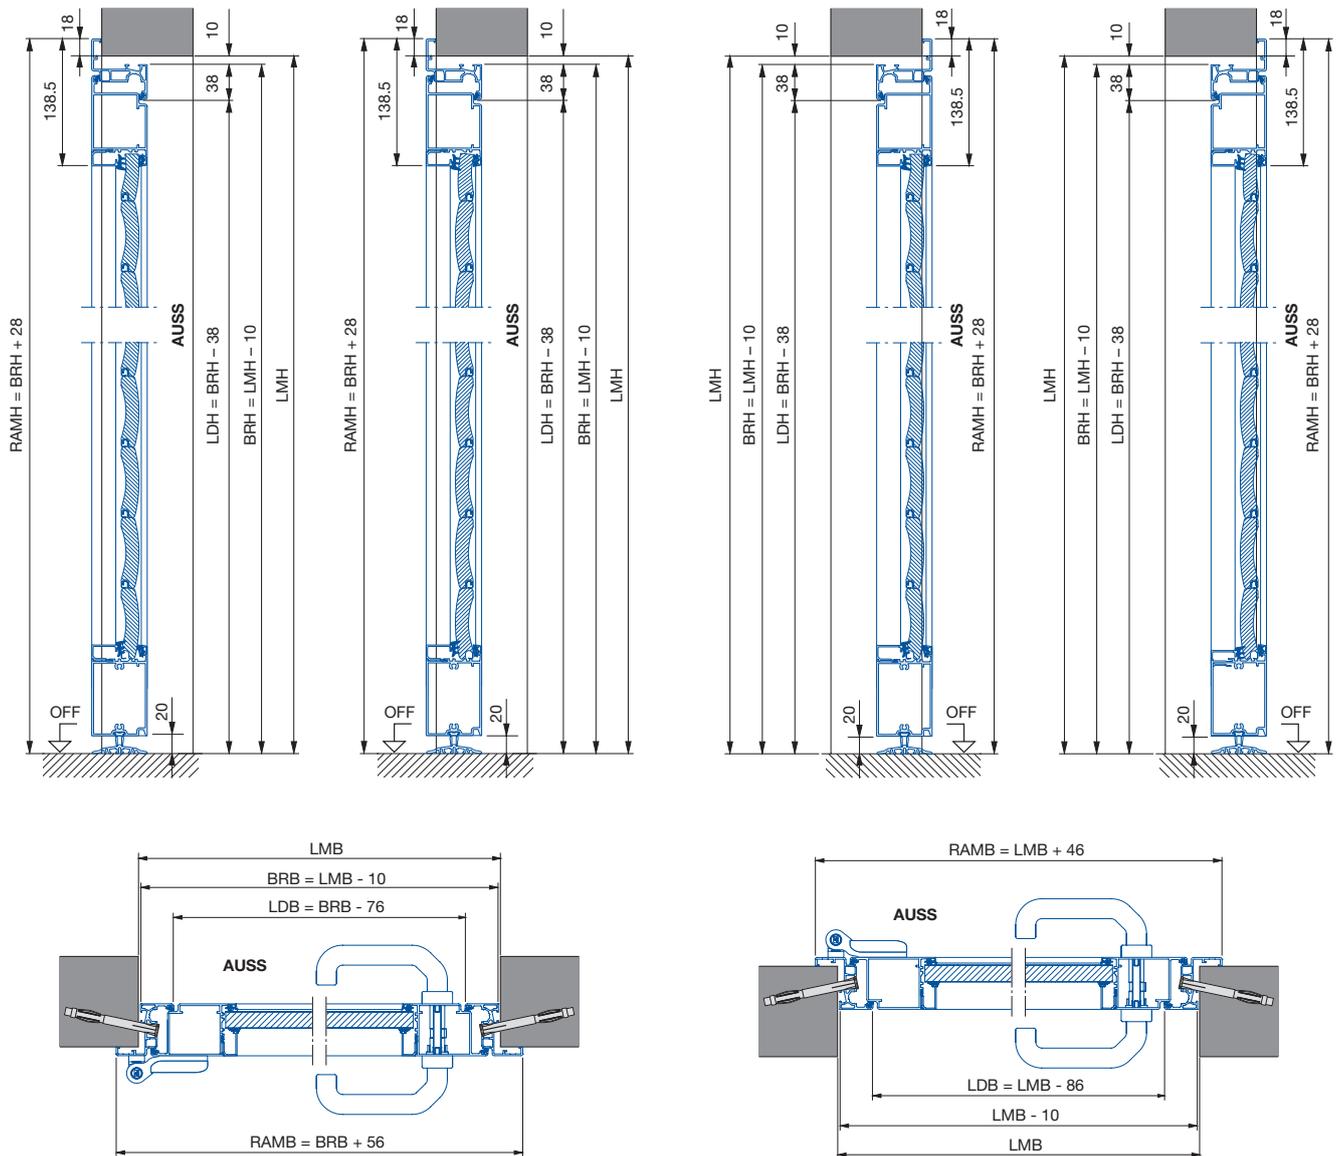

- AUSS** Exterior
- BRB** Nominal width
- BRH** Nominal height
- INNE** Interior
- LDB** Clear passage width
- LDH** Clear passage height
- LI** Left
- LMB** Structural opening width (ordering size)
- LMH** Structural opening height (ordering size)
- RAMB** Overall frame width
- RAMH** Overall frame height
- RE** Right
- OFF** Finished floor level

NT 60 side doors

For roller garage door RollMatic / garage horizontal door RollMatic OD
Single-leaf side doors with block frame made of aluminium profiles



Product description

Subject to changes

General rules

Door set for private use

Notes:

- Doors cannot be driven!
- For internal fitting please state when ordering, subsequent change is not possible.

Door leaf and frame

Door leaf frame and frame made of aluminium extrusion profiles (normal profile, without thermal break), depth 60 mm, 3-sided double door seal, double lip seal in the threshold area.

Door infill: roller garage door sections in RollMatic look. Position of sections does not match the roller garage door RollMatic. Glazing and ventilation grilles arranged as in the roller garage door RollMatic.


Thermal insulation value*:

- Fitted side door NT 60 $U = 5.6 \text{ W}/(\text{m}^2\cdot\text{K})$
- * In relation to door size 1250 x 2200 mm


Version – wide leaf frame

Lever height: 1050 mm

Opening inwards



Opening inwards or outwards



Fittings and closing devices

- Lever handle set with oval rose escutcheons in black plastic, prepared for profile cylinder
- Lock with profile cylinder, keys to differ or keys to pass
- Hinges optionally in black, white or aluminium natural finish

The handle set version can be selected for a surcharge.

Surface coating

Color based on RAL

- Door infill in Colour on interior and exterior
- Standard colours based on the RAL colour chart:

RAL 9016	Traffic white	RAL 7035	Light grey
RAL 1015	Light ivory	RAL 7038	Agate grey
RAL 3003	Ruby red	RAL 8028	Terra brown
RAL 3004	Purple red	RAL 9001	Cream
RAL 5011	Steel blue	RAL 9005	Jet black
RAL 6005	Moss green	RAL 9006	White aluminium*
RAL 7015	Slate grey	RAL 9007	Grey aluminium*
RAL 7016	Anthracite grey		
- Chartwell Green
- Noir 2100 Sablé (Anthracite metallic) – at a surcharge

* IMPORTANT:

Despite the use of state-of-the-art colour coating systems, we cannot rule out colour deviations, specifically in metallic colours such as RAL 9006 or 9007.

Decopaint paint

Decopaint version with paint on the outside and timber design look on the inside

- **Golden Oak** – medium brown, yellow-gold surface with vibrant oak character
- **Rosewood** – reddish-brown stripey timber design

Decograin plastic film coating

Decograin version with plastic film coating with timber design

- **Exterior:** Coated with UV-resistant timber design plastic film with embossed timber structure for an authentic timber character.
 - **Golden Oak** – medium brown, yellow-gold surface with vibrant oak character
 - **Rosewood** – reddish-brown stripey timber design
- **Interior:** coating in RAL 8028 Terra brown

Notes on surface coatings

Deviations in colour are to be expected due to the use of different base materials, such as aluminium and steel, and textures, as well as due to varying production processes and locations.

Despite the use of state-of-the-art colour coating systems, colour deviations cannot be ruled out, specifically in metallic colours such as RAL 9006.

Glazing / ventilation grille

- Glazing / ventilation grille optional
- Not possible in the bottom section and in the lock area (13th and 14th section from the bottom)

NT 60 side doors

For roller garage door RollMatic / garage horizontal door RollMatic OD
Single-leaf side doors with block frame made of aluminium profiles



Product description


Subject to changes

Fitting dimensions

Fitting behind the opening (opening inwards)

Matching
Internal roller garage
doors RollMatic
Garage horizontal doors
RollMatic OD




Matching
External roller garage
doors RollMatic

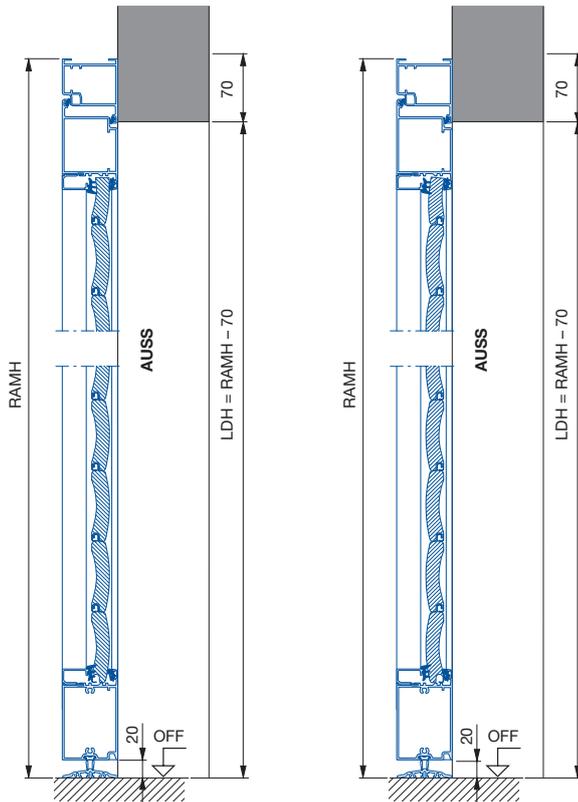

Fitting in the opening (opening inwards)

Matching
Internal roller garage
doors RollMatic
Garage horizontal doors
RollMatic OD

Matching
External roller garage
doors RollMatic

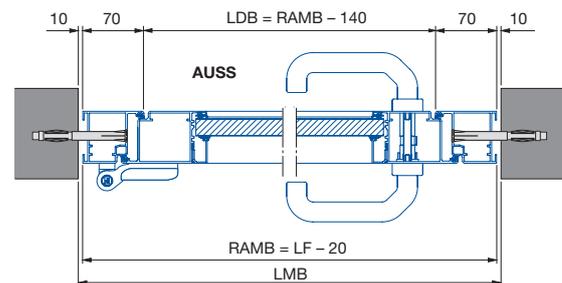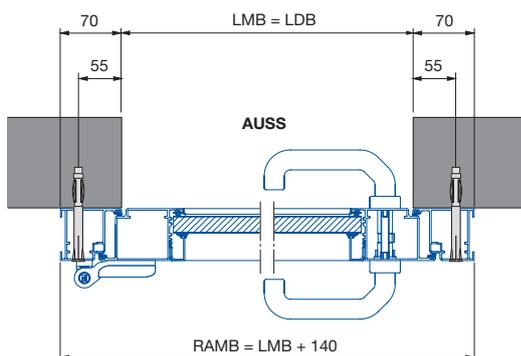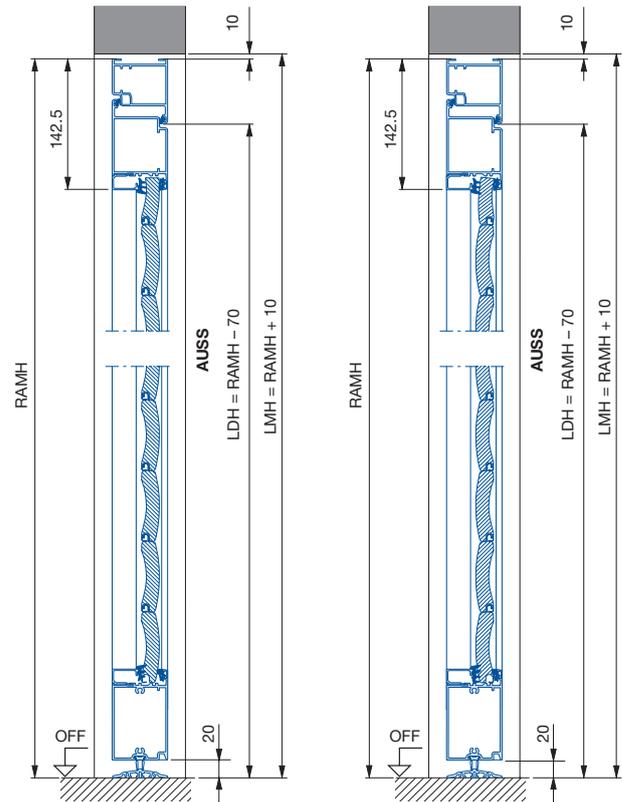

- AUSS** Exterior
- BRB** Nominal width
- BRH** Nominal height
- LMB** Structural opening width
- LMH** Structural opening height
- LDB** Clear passage width
- LDH** Clear passage height
- RAMB** Overall frame dimension width (ordering size)
- RAMH** Overall frame dimension height (ordering size)
- OFF** Finished floor level

NT 60 side doors

For roller garage door RollMatic / garage horizontal door RollMatic OD
Single-leaf side doors with block frame made of aluminium profiles



Subject to changes


Product description

Fitting dimensions

Fitting in the opening (opening outwards)

Matching
Internal roller garage
doors RollMatic
Garage horizontal doors
RollMatic OD

Matching
External roller garage
doors RollMatic

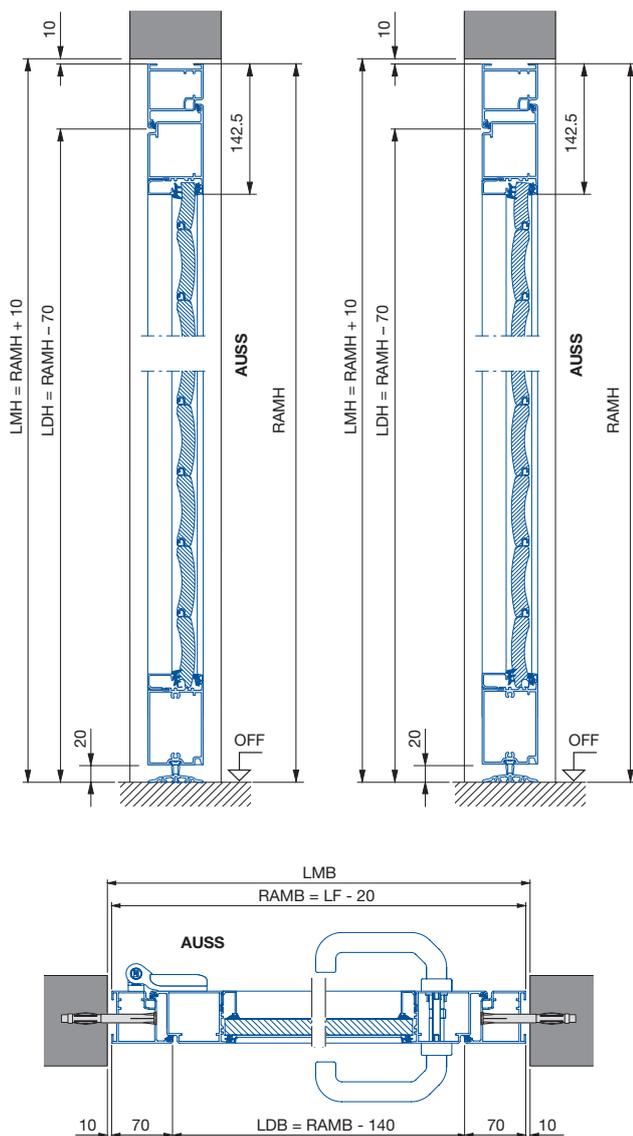

AUSS	Exterior
BMB	Ordering size width
BMH	Ordering size height
BRB	Nominal width
BRH	Nominal height
LMB	Structural opening width
LMH	Structural opening height
LDB	Clear passage width
LDH	Clear passage height
RAMB	Overall frame dimension width (ordering size)
RAMH	Overall frame dimension height (ordering size)
OFF	Finished floor level

Please note that all prices within this price list will increase by 3.8% from 01.01.2026

NT 60 side doors

For roller garage door RollMatic / garage horizontal door RollMatic OD
Single-leaf side doors with corner frame made of aluminium profiles



Size range and prices

For a product description, see page 42

Size range Ordering sizes Nominal sizes Width × Height	 White or Colour	 <i>Decopaint</i> Golden Oak / Rosewood	 <i>Decograin</i> Golden Oak or Rosewood
Opening inwards or outwards			
From 875 × 1800			
Up to 1200 × 2255	1223	1341	1549
From 1201 × 2256			
Up to 1284 × 2500	1277	1390	1620

Note:

View of internal roller garage door / external roller garage door, state opening sense and handing!

High-quality coating			£
Door leaf / frame exterior and interior in colour Noir 2100 Sablé	Surcharge on white	Per door	379
Door leaf / frame exterior and interior in colour Chartwell green	Surcharge on white	Per door	750

NT 60 side doors

For roller garage door RollMatic / garage horizontal door RollMatic OD
Single-leaf side doors with block frame made of aluminium profiles



Size range and prices

For a product description, see page 42

Size range Ordering sizes Overall frame dimensions (RAM) Width × Height	 White or Colour	 <i>Decopaint</i> Golden Oak / Rosewood	 <i>Decograin</i> Golden Oak or Rosewood
Opening inwards or outwards			
From 855 × 1800			
Up to 1200 × 2255	1237	1349	1564
From 1201 × 2256			
Up to 1330 × 2558	1277	1390	1620

Note:

View of internal roller garage door / external roller garage door, state opening sense and handing!




High-quality coating			£
Door leaf / frame exterior and interior in colour Noir 2100 Sablé	Surcharge on white	Per door	379
Door leaf / frame exterior and interior in colour Chartwell green	Surcharge on white	Per door	750

Please note that all prices within this price list will increase by 3.8% from 01.01.2026

Accessories and optional extras

For NT 60 side doors



Glazing element		£	
	Glazing element with clear synthetic pane, window cut-out 112 × 33 mm, black glazing frame on exterior, transparent on interior The number of glazing elements is dependent on the door width (not possible in the bottom section and in the lock area)	Per m 44	
Ventilation grille		£	
	Ventilation grille, black plastic Ventilation cross-section: approx. 13 cm ² /grille The number of ventilation grilles is dependent on the door width (not possible in the bottom section and in the lock area)	Per m 44	
Smaller overall frame dimensions		£	
	Side door in smaller dimensions than special sizes	Per door 577	
Frame fixing (optional)		£	
	Support bracket for block frame	Per set 36	
	Screw-in anchor for corner frame	Per set 39	
Fittings		£	
Lever handle sets			
	Cast aluminium with natural finish (F1), prepared for profile cylinder	Each 160	
	Cast aluminium in RAL 9016, prepared for profile cylinder	Each 195	
	Cast aluminium in black, prepared for profile cylinder	Each 195	
	Brushed stainless steel, prepared for profile cylinder	Each 212	
Lever / knob handle sets			
	Black plastic, prepared for profile cylinder	Each 88	
	Cast aluminium with natural finish (F1), prepared for profile cylinder	Each 187	
	Cast aluminium in RAL 9016, prepared for profile cylinder	Each 232	
	Cast aluminium in black, prepared for profile cylinder	Each 232	
	Brushed stainless steel, prepared for profile cylinder	Each 247	
Overhead door closer			
	Overhead door closer with slide rail and hold-open device	Each 369	
3-point locking			
	3-point locking with latch, bolt, and 2 locking hooks; keys to differ Cannot be retrofitted!	Per door 565	
Electric door strike with day and night setting (without wiring). For doors with block frame made of aluminium profiles.			
	10 – 24 V, LH hinged / RH hinged (only opens with an impulse, i.e. as long as the button is pressed)	Each 140	
	10 – 24 V, LH hinged / RH hinged (remains open after impulse until the door is actuated, subsequent locking by door strike)	Each 187	
Block reed contact			
	Block reed contact (article no. 4004810)	Each 137	
Anti-panic locks		£	
Anti-panic lock function E	For profile cylinders, for fixed knob on outside, the door can only be opened from the outside using a key.	Each 281	
Profile double cylinder		£	
	Profile double cylinder 40 + 40 mm Keys to pass, for side doors NT 60	On request	
NEW. Frame fastening bolts without head (without dowel hole)		Article no.	£
	Set of frame fastening bolts 7.5 × 132 (9 × per set), not for RC2!	4024001	Per set 7
	Set of frame fastening bolts 7.5 × 182 (9 × per set), not for RC2!	4024002	Per set 11
	Set of frame fastening bolts 11 × 132 for RC2 (9 × per set)	4024003	Per set 18
	Set of frame fastening bolts 11 × 182 for RC2 (9 × per set)	4024004	Per set 22

Garage Door Operators

Operator Accessories



Garage door operators				
Boom Length				
	SupraMatic E	SupraMatic P	ProMatic	ProMatic Akku
K	666	741	540	884
M	703	778	577	921
L	818	893	692	1036

Hand transmitters with BiSecur technology are backwards compatible, i.e. they can also be used with series 1 and 2 operators (868 MHz). Hand transmitter 868 MHz BiSecur, incl. battery (Range of radio signal depends on local conditions)

- Possible
- Only in combination with a BiSecur radio receiver
- Only in conjunction with the BiSecur radio receiver ESE, status query possible
- Not possible

Accessory	Description	Garage door operators				
		SupraMatic E / P	SupraMatic HT	ProMatic	ProMatic Akku	RollMatic
HS 1-button hand transmitter  Black HS 1 BS Art. no. 4511720 £ 79	Textured plastic surface with chrome-plated zinc die-cast caps <ul style="list-style-type: none"> • Impulse • Protection category: for dry rooms only • Temperature range: -20 °C to +60 °C • Battery: 1.5 V LR03 / AAA • Dimensions: 38 x 95 x 16 mm 	●	●	●	●	●
HS 4-button hand transmitter  Black HS 4 BS Art. no. 4511724 £ 79	Textured plastic surface with chrome-plated zinc die-cast caps <ul style="list-style-type: none"> • Impulse • Protection category: for dry rooms only • Temperature range: -20 °C to +60 °C • Battery: 1.5 V LR03 / AAA • Dimensions: 38 x 95 x 16 mm 	●	●	●	●	●
HS 5-button hand transmitter  Black HS 5 BS Art. no. 436946 £ 94	Textured plastic surface with chrome-plated zinc die-cast caps <ul style="list-style-type: none"> • Impulse • Status query • Protection category: for dry rooms only • Temperature range: -20 °C to +60 °C • Battery: 1.5 V LR03 / AAA • Dimensions: 38 x 95 x 16 mm 	●	●	●	●	-
HS 5-button hand transmitter   Black White HS 5 BS HS 5 BS Art. no. 436752 436753 £ 94 94	High gloss plastic surface with chrome-plated zinc die-cast caps <ul style="list-style-type: none"> • Impulse • Status query • Protection category: for dry rooms only • Temperature range: -20 °C to +60 °C • Battery: 1.5 V LR03 / AAA • Dimensions: 38 x 95 x 16 mm 	●	●	●	●	-

Garage Door Operators

Operator Accessories



Hand transmitters with BiSecur technology are backwards compatible, i.e. they can also be used with series 1 and 2 operators (868 MHz). Hand transmitter 868 MHz BiSecur, incl. battery (Range of radio signal depends on local conditions)

- Possible
- Only in combination with a BiSecur radio receiver
- Only in conjunction with the BiSecur radio receiver ESE, status query possible
- Not possible

Garage door operators				
SupraMatic E/P	SupraMatic HT	ProMatic	ProMatic Akku	RollMatic

Accessory	Description	SupraMatic E/P	SupraMatic HT	ProMatic	ProMatic Akku	RollMatic																	
<p>HSI Industrial hand transmitter</p> <p>Black Black Black</p> <table border="1"> <thead> <tr> <th></th> <th>HSI 3 BS</th> <th>HSI 6 BS</th> <th>HSI 15 BS</th> </tr> </thead> <tbody> <tr> <td>Art. no.</td> <td>635058</td> <td>4511773</td> <td>4511774</td> </tr> <tr> <td>£</td> <td>111</td> <td>138</td> <td>199</td> </tr> </tbody> </table>		HSI 3 BS	HSI 6 BS	HSI 15 BS	Art. no.	635058	4511773	4511774	£	111	138	199	<ul style="list-style-type: none"> Impulse Protection category: IP 65 <p>HSI 3 BS“</p> <ul style="list-style-type: none"> For controlling up to 3 receivers Dimensions (W x H x D): 36 x 74 x 16 mm Battery: 2 x CR2025 Temperature range: -10°C to +60°C Incl. belt clip and hand transmitter strap <p>HSI 6 BS“</p> <ul style="list-style-type: none"> For controlling up to 6 receivers Dimensions (W x H x D): 50 x 90 x 25 mm Battery: 2 x 1.5 V LR03 / AAA Temperature range: -20°C to +60°C Incl. belt clip and lanyard <p>HSI 15 BS“</p> <ul style="list-style-type: none"> For controlling up to 15 receivers Dimensions (W x H x D): 65 x 133 x 25 mm Battery: 4 x 1.5 V LR03/AAA Temperature range: -20°C to +60°C Incl. belt clip and lanyard 										
	HSI 3 BS	HSI 6 BS	HSI 15 BS																				
Art. no.	635058	4511773	4511774																				
£	111	138	199																				
<p>Accessories Hand transmitter holder</p> <table border="1"> <thead> <tr> <th></th> <th>For HSI 3 BS</th> <th>For HSI 6 BS</th> <th>For HSI 15 BS</th> </tr> </thead> <tbody> <tr> <td>Art. no.</td> <td>635059</td> <td>437383</td> <td>437384</td> </tr> <tr> <td>£</td> <td>11</td> <td>11</td> <td>15</td> </tr> </tbody> </table>		For HSI 3 BS	For HSI 6 BS	For HSI 15 BS	Art. no.	635059	437383	437384	£	11	11	15	<ul style="list-style-type: none"> Hand transmitter holder Fitting accessories for mounting to the wall or tubular frame 										
	For HSI 3 BS	For HSI 6 BS	For HSI 15 BS																				
Art. no.	635059	437383	437384																				
£	11	11	15																				
<p>HSE 1-button hand transmitter</p> <p>Black</p> <table border="1"> <thead> <tr> <th></th> <th>HSE 1 BS</th> </tr> </thead> <tbody> <tr> <td>Art. no.</td> <td>4511728</td> </tr> <tr> <td>£</td> <td>79</td> </tr> </tbody> </table>		HSE 1 BS	Art. no.	4511728	£	79	<p>Textured plastic surface with chrome-plated zinc die-cast caps</p> <ul style="list-style-type: none"> Impulse Incl. key ring for fastening to the key chain Protection category: for dry rooms only Temperature range: 0 °C to +60 °C Battery: Lithium round cell 3 V / type CR 2032 Dimensions: 28 x 70 x 14 mm 																
	HSE 1 BS																						
Art. no.	4511728																						
£	79																						
<p>HSE 4-button hand transmitter</p> <p>Black White</p> <table border="1"> <thead> <tr> <th></th> <th>HSE 4 BS</th> <th>HSE 4 BS</th> </tr> </thead> <tbody> <tr> <td>Art. no.</td> <td>4511561</td> <td>4511565</td> </tr> <tr> <td>£</td> <td>79</td> <td>79</td> </tr> </tbody> </table>		HSE 4 BS	HSE 4 BS	Art. no.	4511561	4511565	£	79	79	<p>High-gloss plastic surface with chrome-plated zinc diecast caps</p> <ul style="list-style-type: none"> Impulse Incl. key ring for fastening to the key chain Protection category: for dry rooms only Temperature range: 0 °C to +50 °C Battery: Lithium round cell 3 V / type CR 2032 Dimensions: 28 x 70 x 14 mm 													
	HSE 4 BS	HSE 4 BS																					
Art. no.	4511561	4511565																					
£	79	79																					
<p>HSE 4-button hand transmitter HSE 4 BS</p> <table border="1"> <thead> <tr> <th>Housing colour</th> <th>Art. no.</th> <th>£</th> </tr> </thead> <tbody> <tr> <td>Anthracite grey</td> <td>4511573</td> <td>94</td> </tr> <tr> <td>Frozen grey</td> <td>4511569</td> <td>94</td> </tr> <tr> <td>Classic grey</td> <td>4511577</td> <td>94</td> </tr> <tr> <td>Carbon</td> <td>4511585</td> <td>94</td> </tr> <tr> <td>Silver</td> <td>4511581</td> <td>94</td> </tr> </tbody> </table>	Housing colour	Art. no.	£	Anthracite grey	4511573	94	Frozen grey	4511569	94	Classic grey	4511577	94	Carbon	4511585	94	Silver	4511581	94					
Housing colour	Art. no.	£																					
Anthracite grey	4511573	94																					
Frozen grey	4511569	94																					
Classic grey	4511577	94																					
Carbon	4511585	94																					
Silver	4511581	94																					

Garage Door Operators

Operator Accessories



Hand transmitters with BiSecur technology are backwards compatible, i.e. they can also be used with series 1 and 2 operators (868 MHz). Hand transmitter 868 MHz BiSecur, incl. battery (Range of radio signal depends on local conditions)

- Possible
- Only in combination with a BiSecur radio receiver
- Only in conjunction with the BiSecur radio receiver ESE, status query possible
- Not possible

Accessory		Description	SupraMatic E/P	SupraMatic HT	ProMatic	ProMatic Akku	RollMatic
HSE	4-button hand transmitter	Textured plastic surface with chrome-plated zinc die-cast caps <ul style="list-style-type: none"> • Impulse • Incl. key ring for fastening to the key chain • Protection category: for dry rooms only • Temperature range: 0 °C to +60 °C • Battery: Lithium round cell 3 V/type CR 2032 • Dimensions: 28 × 70 × 14 mm 	●	●	●	●	●
	 Black						
	HSE 4 BS						
Art. no.	4511732						
£	79						
HSE	4-button hand transmitter	Textured plastic surface with plastic caps <ul style="list-style-type: none"> • Impulse • Incl. key ring for fastening to the key chain • Protection category: for dry rooms only • Temperature range: 0 °C to +60 °C • Battery: Lithium round cell 3 V/type CR 2032 • Dimensions: 28 × 70 × 14 mm 	●	●	●	●	●
	 Black						
	HSE 4 BS						
Art. no.	4511736						
£	72						
Accessories	For hand transmitter (HSE)	<ul style="list-style-type: none"> • For HSE 1 BS, HSE 2 BS and HSE 4 BS • Transparent, incl. visor clip • For wall fitting or for fitting to the visor clip • without fixing material 					
							
	Hand transmitter holder						
Art. no.	437006						
£	13						
HSD		<ul style="list-style-type: none"> • Impulse • High-quality metal housing • As a key ring • Protection category: for dry rooms only • Temperature range: 0 °C to +60 °C • Battery: Lithium round cell 3 V/type CR 2025 • Dimensions (W × H × D): 32 × 66 × 13 mm 	●	●	●	●	●
	 Chrome						
	HSD 2-C BS						
Art. no.	436775						
£	113						
HSZ	1-button hand transmitter	2-button hand transmitter					
							
	Black	Black					
	HSZ 1 BS	HSZ 2 BS					
Art. no.	436779	436782					
£	72	72					

Garage Door Operators

Operator Accessories



Hand transmitters with BiSecur technology are backwards compatible, i.e. they can also be used with series 1 and 2 operators (868 MHz). Hand transmitter 868 MHz BiSecur, incl. battery (Range of radio signal depends on local conditions)

- Possible
- Only in combination with a BiSecur radio receiver
- Only in conjunction with the BiSecur radio receiver ESE, status query possible
- Not possible

Garage door operators				
SupraMatic E/P	SupraMatic HT	ProMatic	ProMatic Akku	RollMatic

Radio internal push button / internal receiver							
FIT	1-button radio internal push button	 <ul style="list-style-type: none"> • Protection category: for dry rooms only • Temperature range: -20 °C to +60 °C • Battery: 2 x 1.5 V LR03 / AAA • Colour: Pure white RAL 9010 • Dimensions (W x H x D): 80 x 80 x 15 mm • Screw and adhesive fixing 					
Art. no.	FIT 1 BS 439740						
£	118						
FIT	4-button radio internal push button	 <ul style="list-style-type: none"> • Impulse • Protection category: for dry rooms only • Temperature range: -20 °C to +60 °C • Battery: 2 x 1.5 V LR03 / AAA • Colour: Pure white RAL 9010 • Dimensions (W x H x D): 80 x 80 x 15 mm • Screw and adhesive fixing 					
Art. no.	FIT 4 BS 439741						
£	118						
FIT	5-button radio internal push button	 <ul style="list-style-type: none"> • Impulse • Status query • Protection category: for dry rooms only • Temperature range: -20 °C to +60 °C • Battery: 2 x 1.5 V LR03 / AAA • Colour: Pure white RAL 9010 • Dimensions (W x H x D): 80 x 80 x 15 mm • Screw and adhesive fixing 					
Art. no.	FIT 5 BS 439742						
£	138						
Internal push button							
IT 3b-1 M	Internal push button	 <ul style="list-style-type: none"> • Impulse • Operator light switched on via movement detector • Additional buttons for light on / off, operator on / off (vacation mode) and movement detector on / off • Illuminated keypad • With 7 m connecting lead, 2-wire • Protection category: for dry rooms only • Temperature range: -20 °C to +50 °C • Colour: Pure white RAL 9010 • Dimensions (W x H x D): 80 x 80 x 45 mm 					
NEW.							
Art. no.	IT 3b-1 Motion 4556758						
£	123						

Garage Door Operators

Operator Accessories



Hand transmitters with BiSecur technology are backwards compatible, i.e. they can also be used with series 1 and 2 operators (868 MHz). Hand transmitter 868 MHz BiSecur, incl. battery (Range of radio signal depends on local conditions)

- Possible
- Only in combination with a BiSecur radio receiver
- Only in conjunction with the BiSecur radio receiver ESE, status query possible
- Not possible

Garage door operators				
SupraMatic E/P	SupraMatic HT	ProMatic	ProMatic Akku	RollMatic

Radio internal push button 868 MHz BiSecur, incl. battery (Range of radio signal depends on local conditions)

FIT Radio internal push button



FIT 2-1 BS

Art. no. 4511695
£ 107

- Impulse
- With 2 impulse push buttons for control of 2 operators via radio signal
- One additional button for On/Off function of connected external control elements
- Connection option for max. 2 control elements (volt-free contact) e.g. key switch
- Protection category: for dry rooms only
- Temperature range: -20°C to +60°C
- Battery: 2 x 1.5 V LR03/AAA
- Colour: Pure white RAL 9010
- Dimensions (W x H x D): 80 x 80 x 45 mm

●	●	●	●	●
---	---	---	---	---

IT 3b-1 Internal push button



IT 3b-1

Art. no. 4511647
£ 55

- Impulse
- Additional buttons for light on/off and operator on/off (vacation mode)
- Illuminated keyboard
- With 7 m connection cable, 2-wire
- Protection category: for dry rooms only
- Temperature range: -20°C to +60°C
- Colour: Pure white RAL 9010
- Dimensions (W x H x D): 80 x 80 x 45 mm

●	●	●	-	●
---	---	---	---	---

Radio finger-scan 868 MHz BiSecur (range of radio signal depends on local conditions!)

FFL Radio finger-scan



FFL 25 BS

Art. no. 4511865
£ 278

- Impulse
 - To control up to 2 door operators using a fingerprint
 - Up to 25 fingerprints can be taught in, cannot be individually deleted
 - Hinged lid
 - Automatic activation on opening the lid or by pushing the "ON" button
 - Protection category: IP 44
 - Temperature range: -20°C to +50°C
 - Power supply: Battery 2 x 1.5 V LR03/AAA
 - Housing: Plastic, painted, colour White aluminium RAL 9006
- FFL 25 BS (recessed):**
- Dimensions (W x H x D): 80 x 80 x 20 mm
- FFL 25 BS (surface-mounted):**
- Dimensions (W x H x D): 80 x 80 x 35 mm

●	●	●	●	●
---	---	---	---	---

Batteries Description

HNA Emergency battery



HNA 18-4

Art. no. 4510095
£ 278

- Emergency power supply to bypass power failures up to 18 hours and max. 5 door cycles (depending on temperatures, situation of charge etc.)
 - To be fixed on operator or garage ceiling
 - Protection category: for dry rooms only
 - Weight: approx. 2.3 kg
 - Operating voltage: 24 V DC / 2.3 Ah
 - Dimensions (W x H x D): 150 x 70 x 90 mm
- Also suitable for series 2 SupraMatic and ProMatic operators.

●	●	●	-	-
---	---	---	---	---

HNA Emergency battery



HNA Outdoor

Art. no. 436522
£ 294

- Emergency power supply to bridge power outages
 - Universal fixing for wall and floor fitting
 - Double LED function display
 - Protection category: IP 65
 - Weight: approx. 3 kg
 - Dimensions: 213 x 143 x 96 mm
 - Battery voltage: 24 V DC / 2.3 Ah
- For RotaMatic/P/PL from autumn 2010 and for LineaMatic/P/H from year of manufacture 10/2009.

-	-	-	-	-
---	---	---	---	---

Operator accessories



Lighting/Safety technology

- Possible
- Only in conjunction with a BiSecur radio receiver
- Only in conjunction with the BiSecur radio receiver ESE, status query possible
- Not possible



Garage door operators				
SupraMatic E / P	SupraMatic HT	ProMatic	ProMatic Akku	RollMatic

LED strips

LED strips						
NEW.		<ul style="list-style-type: none"> Light colour: neutral-white, bright natural-quality lighting for the garage Colour temperature: 4000 K Simple fitting on the guide rails of the garage door and the existing cross struts, magnetic attachment Variable arrangement up to door widths of 6000 mm Protection category: IP 65 				

	LED strip garage lighting	LED strip garage lighting, including option relay HOR1-HCP
Art. no.	4556539	4556540
£	187	249

Note:

- Power supply unit (article no. 436534) is also required and must be ordered separately!

Alarm sensor

Hörmann alarm sensor						
NEW.		<ul style="list-style-type: none"> Alarm sensor with alarm encoder and sirens Alarm in case of attempted break-in when the garage door is opened by force Securing of sectional doors in ventilation position / partial opening / close Acoustic signal at 110 db when door system tampering is detected 				

	HAS 1
Art. no.	4556905
£	129

Warranty

Hörmann products are manufactured to the highest quality standards and leave our factory only after rigorous quality testing. However, if you should have grounds for complaint, this section tells you what our door warranty offers, and how to go about making your claim.

In the unlikely event of a warranty claim becoming necessary, please contact the dealer or distributor who originally supplied your garage door. Your dealer should then supply details of the claim, together with a copy of the warranty card provided with the door and proof of purchase to the Product Services Department at Hörmann (UK) Ltd. To enable your claim under warranty to be processed as quickly as possible, you should provide the following details:

1. Your name, address and telephone number
2. Original invoice with date of purchase
3. Product description/door type and product number
4. Description of defect

An assessment of the claim will then be made. This may require Hörmann to inspect the product in-situ. In the event that there is no legitimate warranty claim under the terms specified herein, you may be liable for the costs of the inspection visit. We strongly recommend that you take note of the care and usage instructions displayed on the stickers on the back of your garage door, and on the page opposite, and that you follow these instructions throughout.

Hörmann installers

Hörmann (UK) Ltd has a nationwide network of recommended installers who will be able to offer you a regular maintenance service on your garage door. Please call us on 01530 513050 for details of your nearest dealer.

The Quality Check

A new garage door can be a significant investment that will transform the appearance of your home. This information is a guide to the quality you can expect.

Hörmann (UK) Ltd Garage Door Warranty

Warranty Period	The purchaser is granted a warranty covering the safe and reliable function of the Hörmann garage door for a period of 10 years from the date of purchase. A 5 year warranty applies to springs, wire cables, track rollers, hinges and guide rollers. The warranty period for replacement parts is 6 months or to the end of the current warranty period, whichever is longer. In the case of foil-coated timber-effect, a warranty of 5 years is granted on the door panels alone under the terms and conditions specified herein. The door mechanism and steel frame (if applicable) is covered by the 10 year warranty period.
Requirements	Warranty claims are only applicable in the country where the garage door was purchased. The product must have been purchased through our authorised distribution channels. The warranty only covers damage to the contract object. The fully completed warranty card together with the receipt of purchase correspondingly dated substantiates your right to claim under the warranty.
Performance	During the warranty period we undertake to rectify any and all defects to the Hörmann product which can be proved to be attributed to a material or manufacturing fault. We pledge at our discretion either to exchange the defective merchandise for faultless merchandise, repair it or allow a reduction in price. We do not accept costs for dismantling and installation nor for carriage. Replaced parts become our property. The warranty does not cover damage caused through: <ul style="list-style-type: none">• normal wear and tear• improper installation• negligent care and maintenance• improper initial and subsequent operation• negligent or wanton destruction• external influences such as fire, water, salts, alkaline solutions, acids, abnormal environmental influences• mechanical damage through improper transport and fitting• priming and other surface protection treatments• incorrect or too late applied surface protection treatments• repair by non-qualified persons• using non-Hörmann parts without the approval of the manufacturer• removal of the product number or making it unidentifiable

Electric Operator Warranty

A separate 5 year warranty is granted on our electric operators. This includes operator mechanics, motor and motor control systems. A 2 year warranty is granted on radio equipment, accessories and system controls. There is no warranty on consumables (e.g. fuses, batteries, bulbs etc.). For further details please contact us on 01530 513030 or through our website on www.hormann.co.uk

User Information/Care

Finish – Steel Doors

The coating process applied to the door and chassis is environmentally friendly. Minor scratches or marks are not covered under the conditions of our warranty and should be repaired immediately to prevent corrosion and deterioration of the panel. Corrosive substances such as acids, alkalines, and salts, etc. should be cleaned from the door immediately; failure to do so will result in deterioration of the finish, which will not be covered under our warranty. Should deterioration of the finish start to occur you will need to repaint your door immediately. Prepare the surface lightly with wet and dry. Then treat with solvent based 2 pack epoxy wash primer and a normal commercial paint (cellulose paint must not be used). Hörmann steel doors are a finished product. They do not require re-painting on site. They are however not immune to damage, which can occur at any stage of the handling of the product from factory to site.

Paint Finish – Steel Doors

Minor surface damage can easily be repaired using touch up sprays or sticks without invalidating warranties.

The following document was designed by the Association of Garage Door Specialists, updated by the DHF and endorsed by all major UK garage door manufacturers, as a guide for purchasers of domestic garage doors.

Visual appearance of Garage Doors

A new garage door can be a significant investment that will transform the appearance of your home. This information is a guide to the quality you can expect.

The Quality Check

The quality check should be carried out in natural daylight, not direct sunlight. Stand at a distance of 3 metres from the door to view the overall appearance. The door is acceptable if, taking into account the facts below, none of the following are readily visible on the face of the door:

- Marks or distortion associated with the manufacturing process
- Minor indentations, marks or scuffs on the surface
- Paint or stain blemishes

The Facts

Steel Doors

Panel Distortion The rolling or pressing of steel panels during manufacture will cause distortion in the steel and while every effort is made to keep this to a minimum, inevitably some visible distortion will remain. The application of high gloss paints will make this slight distortion more apparent, especially under certain lighting conditions, such as car headlamps, or bright sunshine.

Paint Finish Primed doors – the primer coating is applied as a base coat only and as such requires additional finishing with a good quality exterior paint. Any marks or scratches on the primer coat should be rubbed down and repainted as part of this finishing process.

All Doors

Colour Match Pairs of doors should be ordered together to obtain the best colour match, bearing in mind the limitations of the materials used in the construction.

Size Variation As the size of a door changes in height and/or width, the panel frequency and profile can change, therefore doors of the same style but of different sizes can be significantly different in appearance.

Clearances All doors require operating clearances, i.e. the gap between the door panel and the frame opening, these are inbuilt during manufacture and should not be reduced by means of infills, or draughtproofing.

Deflection When in the open position, all doors will display a level of vertical deflection or “sag” across the width of the panel. Individual manufacturers’ specifications should be consulted for exact tolerances.

Power Operated Garage Doors

It is against the law to install a power operated garage door in the UK without complying with the Machinery Directive.

To comply with the Machinery Directive both the door and the operator used in the installation must have a Declaration of Incorporation from the manufacturer.

On completion of the installation the installer must provide a Declaration of Conformity and apply a CE mark giving details of the installation to the door / operator combination, which is now classed as a machine.

The installer must issue to the customer a Declaration of Conformity on completion of the installation.

The installer must hold copies of both the Declaration of Incorporation and the Declaration of Conformity on a technical file for inspection by the relevant authorities.

If any of the above requirements are not fulfilled the installation is illegal.


Please ensure for your own safety and peace of mind that whoever installs your electric operator is both willing and able to fulfil these requirements; if they are not – do not use them!

Members of the DHF Garage Door Installer Group can and will install your Hörmann operator safely and legally.

Since the company's policy is one of continuous improvement of its products, we reserve the right to make any alterations in design, manufacture or price. All business is governed by the company's Standard Conditions and this document does not form any part of any contract with the company and statements contained in it should not be construed as representations or warranties.

Brand quality for residential and commercial construction

The family-owned company Hörmann offers all important construction components for building and renovating projects from a single source. We manufacture in highly-specialised factories using state-of-the-art production technologies. Furthermore, our employees work intensively on new products, continual further developments and improvements to details. The results are patents and one-of-a-kind products you can depend on.

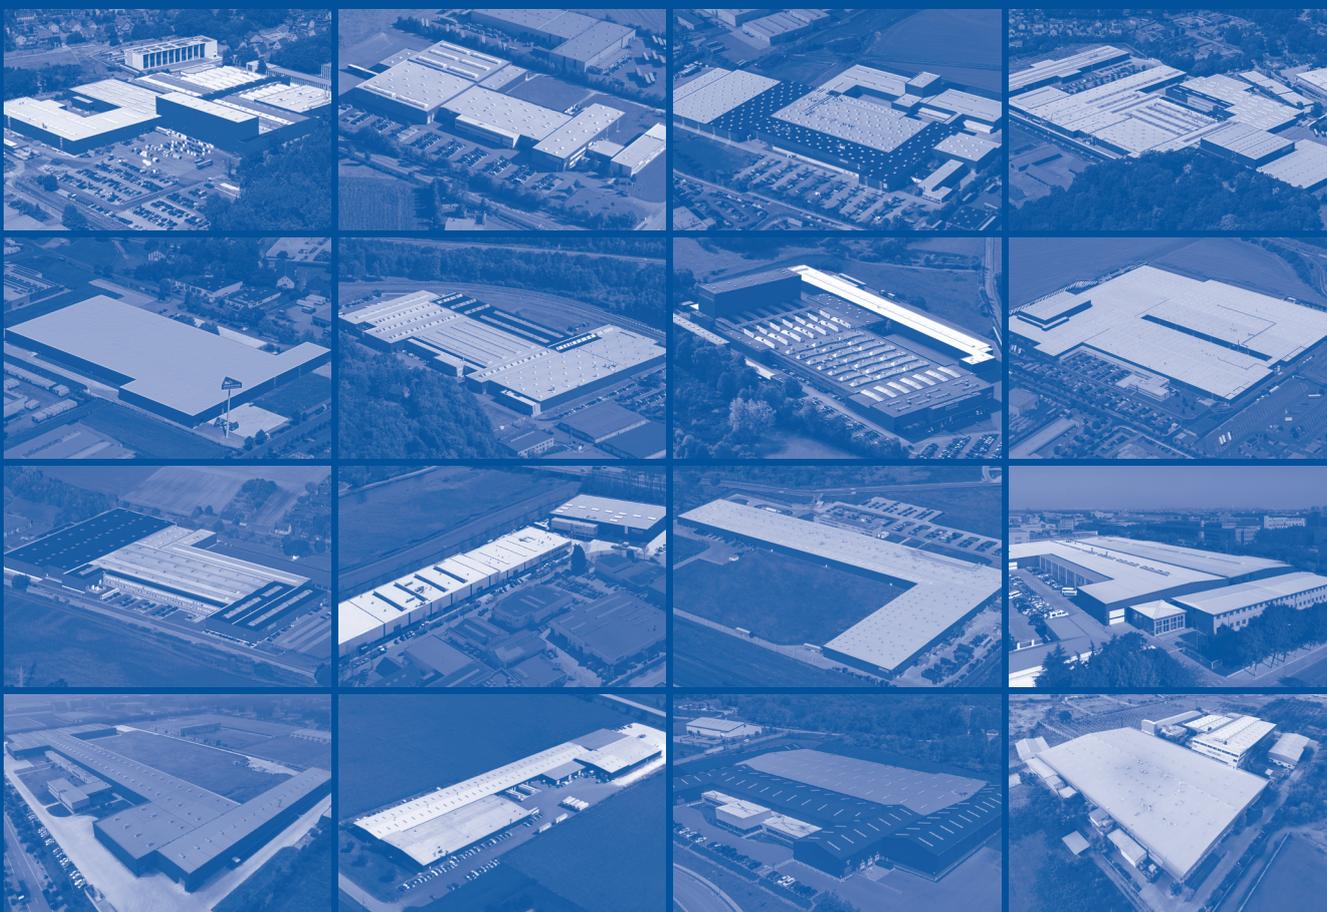

01.03.2025 V.1

www.hormann.co.uk

Hörmann (UK) Ltd
Gee Road
Coalville
Leicestershire
LE67 4JW

Tel: 01530 513000
Fax: 01530 513001

www.hormann.co.uk

HÖRMANN